


Order no. P217 0365 13 Part no. 217 584 19 08 Edition A 2021

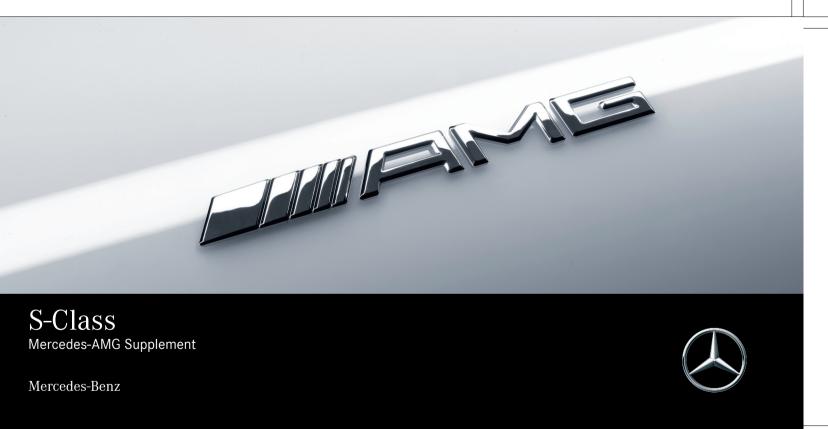

Publication details

Internet

Further information about Mercedes-Benz vehicles and about Mercedes-Benz AG can be found on the following websites:

https://www.mbusa.com (USA only)

https://www.mercedes-benz.ca (Canada only)

Documentation team

[©]Mercedes-Benz AG: Not to be reprinted, translated or otherwise reproduced, in whole or in part, without written permission from Mercedes-Benz AG.

Vehicle manufacturer

Mercedes-Benz AG Mercedesstraße 120 70372 Stuttgart Germany



As at 24.09.19

Thank you for purchasing a Mercedes-AMG

Before you first drive off, read this Operator's Manual carefully and familiarize yourself with your vehicle. For your own safety and a longer operating lifespan of the vehicle, follow the instructions and warning notices in this Operator's Manual. Disregarding them may lead to damage to the vehicle or injury to people.

Damage to the vehicle resulting from the disregard of the instructions is not covered by the Mercedes-Benz Limited Warranty.

The standard equipment and product description of your vehicle may vary and depends on the following factors:

- Model
- Order
- National version
- Availability

Mercedes-AMG reserves the right to introduce changes in the following areas:

- Design
- Equipment

• Technical features

The equipment in your vehicle may therefore differ from that shown in the descriptions and illustrations.

The following documents are integral parts of the vehicle:

- Digital Operator's Manual
- Printed Operator's Manual
- Maintenance Booklet
- Equipment-dependent Supplements

Keep these documents in the vehicle at all times. If you sell the vehicle, always pass all of the documents on to the new owner.

Mercedes-Benz USA, LLC

Mercedes-Benz Canada, Inc.

A Daimler Company



2 Contents

Symbols	3
At a glance Cockpit	
General notes Operator's Manual Operating safety Qualified specialist workshop Correct use of the vehicle Limited Warranty	7 8
Occupant safety Seat belts	10 10
Driving and parking Driving DYNAMIC SELECT switch Automatic transmission Driving and driving safety systems Function of the AMG steering-wheel but-	11 13 14 16
tons	24

Instrument Display and on-board computer	25
Notes on the Instrument Display and on-	
board computer	25
Operating the on-board computer Calling up displays on the Performance	25
menu Displaying and starting RACE TIMER on	27
the Performance menu	28
Function of the Head-up Display	29
Multimedia system	31
AMG TRACK PACE	3.

Breakdown assistance	36
Flat tire	36

Wheels and tires Overview of the tire-change tool kit	37
Changing a wheel Installing/removing the longitudinal member panel	

Technical data	39
Operating fluids	39
Vehicle data	40

Display messages and warning/indi-

cator lamps	43
	43
Warning and indicator lamps	44

Index 40	6
----------	---

In this Operator's Manual, you will find the following symbols:

DANGER Danger due to not observing the warning notices

Warning notices draw your attention to hazards that may endanger your health or life, or the health or life of others.

- Observe the warning notices.
- ENVIRONMENTAL NOTE Environmental damage due to failure to observe environmental notes

Environmental notes include information on environmentally responsible behavior or environmentally responsible disposal.

- Observe environmental notes.
- NOTE Damage to property due to failure to observe notes on material damage

Notes on material damage inform you of risks which may lead to your vehicle being damaged.

Observe notes on material damage.

- i These symbols indicate useful instructions or further information that could be helpful to you.
 - Instruction


┺

 \blacktriangleright

*

- $(\longrightarrow \text{page})~$ Further information on a topic
- Display Information on the multifunction display/media display
 - Highest menu level, which is to be selected in the multimedia system
 - Relevant submenus, which are to be selected in the multimedia system
 - Indicates a cause

4 At a glance – Cockpit

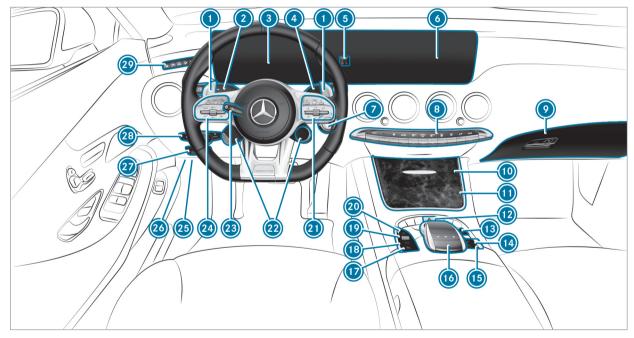

Left-hand-drive vehicles (Coupe)

At a glance – Cockpit 5

Steering wheel gearshift paddles	\rightarrow	14
Combination switch		
Instrument Display	\rightarrow	25
OIRECT SELECT lever		
PASSENGER AIR BAG indicator lamps		
Media display		
Start/stop button	\rightarrow	11
Climate control systems		
Ø Glove box		
Stowage compartment		
Oup holder		
Hazard warning light system		
Active Parking Assist		
AMG adaptive sport suspension system	\rightarrow	20
AMG Performance exhaust system	\rightarrow	12
Touchpad		
Activates/deactivates ESP [®]	\rightarrow	16

18	Manual gearshifting	\rightarrow	14
19	DYNAMIC SELECT switch	\rightarrow	13
20	ECO start/stop function	\rightarrow	12
21	Control panel for the multimedia system		
22	AMG steering-wheel buttons	\rightarrow	24
23	Adjusts the steering wheel		
	Switches the steering wheel heater on/off		
24	Control panel:		
	On-board computer	\rightarrow	25
	Cruise control		
	Active Distance Assist DISTRONIC		
25	Diagnostics connection		
26	Opens the hood		
27	Electric parking brake		
28	Light switch		
29	Control panel for:		
	Active Steering Assist		

6 At a glance – Cockpit

Active Lane Keeping Assist	Head-up Display	\rightarrow	29
Parking Assist PARKTRONIC	Sets the vehicle level	\rightarrow	22
Night View Assist			

Operator's Manual

This Supplement provides information on all the important functions of your AMG vehicle that are either not described or differ from the descriptions in the vehicle Operator's Manual. This information supplements or replaces the corresponding sections in the vehicle Operator's Manual. Under no circumstances does the Supplement replace the Operator's Manual.

This Supplement describes all models, and standard and optional equipment for your vehicle, as available at the time of going to press. Country-specific differences are possible. Bear in mind that your vehicle may not feature all functions described here. This is also the case for systems and functions relevant to safety. Therefore, the equipment on your vehicle may differ from that in the descriptions and illustrations.

The original purchase contract documentation for your vehicle contains a list of all of the systems in your vehicle. Should you have any questions concerning equipment and operation, please consult an authorized Mercedes-Benz Center.

The Operator's Manual, the Supplement and the Maintenance Booklet are important documents and should be kept in the vehicle.

Operating safety

- WARNING Risk of accident due to malfunctions or system failures
- To avoid malfunctions or system failures:
- Always have the prescribed service and maintenance work as well any required repairs carried out at a qualified specialist workshop.
- WARNING Risk of accident or injury due to incorrect modifications on electronic component parts

Modification of electronic components, their software or wiring could impair their function

and/or the function of other networked component parts or safety-relevant systems.

This can endanger the operating safety of the vehicle.

- Never tamper with the wiring and electronic component parts or their software.
- You should have all work on electrical and electronic components carried out at a qualified specialist workshop.

Observe the "On-board electronics" section in "Technical data" in the vehicle Operator's Manual.

WARNING Risk of fire due to flammable
 materials on hot parts of the exhaust
 system

Flammable material such as leaves, grass or twigs may ignite if they come into contact with hot parts of the exhaust system.

8 General notes

- When driving on unpaved roads or offroad, regularly check the vehicle underside.
- Remove trapped plants or other flammable material, in particular.
- If there is damage, consult a qualified specialist workshop immediately.

NOTE Damage to the vehicle

In the following situations, in particular, there is a risk of damage to the vehicle:

- The vehicle becomes grounded, e.g. on a high curb or an unpaved road
- The vehicle is driven too fast over an obstacle, e.g. a curb, speed bump or pothole
- A heavy object strikes the underbody or chassis components

In situations such as this, the body, the underbody, chassis components, wheels or tires could be damaged without the damage being visible. Components damaged in this way can unexpectedly fail or, in the case of an accident, may not absorb the loads that arise as intended.

If the underbody paneling is damaged, flammable materials such as leaves, grass or twigs can collect between the underbody and the underbody paneling. These materials may ignite if they come into contact with hot parts on the exhaust system.

Have the vehicle checked and repaired immediately at a qualified specialist workshop.

or

If driving safety is impaired while continuing your journey, pull over and stop the vehicle immediately in accordance with the traffic conditions, and contact a qualified specialist workshop.

Qualified specialist workshop

An authorized Mercedes-Benz Center is a qualified specialist workshop. It has the necessary special skills, tools and qualifications to correctly carry out the work required on your vehicle. This particularly applies to safety-relevant works.

For the following, always have your vehicle checked at an authorized Mercedes-Benz Center:

- safety-relevant works
- · service and maintenance work
- repair work
- modifications as well as installations and conversions
- work on electronic components

Mercedes-AMG recommends a Mercedes-Benz service center.

Correct use of the vehicle

If you remove any warning stickers, you or others could fail to recognize certain dangers. Leave warning stickers in position.

Observe the following information in particular when driving your vehicle:

· the safety notes in this manual

General notes 9

- technical data for the vehicle
- traffic rules and regulations
- laws and safety standards pertaining to motor vehicles

Limited Warranty

NOTE Damage to the vehicle arising from violation of these operating instructions.

Damage to the vehicle can arise from violation of these operating instructions.

This damage is not covered either by the Mercedes-Benz implied warranty or by the New- or Used-Vehicle Warranty.

Follow the instructions in these operating instructions on proper operation of your vehicle as well as on possible vehicle damage.

10 Occupant safety

Seat belts

Reduced protection

The AMG sport seat is designed for the standard three-point seat belt. If you install a different multipoint seat belt, e.g. sport or racing seat belts, the restraint system cannot provide the intended level of protection.

Depending on the type of seat, there may be openings in the seat backrest. These openings have no function.

WARNING Risk of injury or fatal injury due to modified seat belt systems

If you feed seat belts through the opening in the seat backrest, the seat backrest may be damaged or may even break in the event of an accident.

- Only use the standard three-point seat belt.
- Never modify the seat belt system.

Function of the seat belt extender

The seat belt extender for the front seat helps you fasten your seat belt. When the door is closed, the seat belt extender extends.

The seat belt extender retracts again in the following cases:

- the seat belt tongue is engaged in the seat belt buckle
- The seat belt tongue is not engaged in the seat belt buckle within 60 seconds
- The respective door is opened
- You fold the seat backrest forwards
- Nobody is sitting in the front passenger seat

The seat belt extender must always be retracted while the vehicle is in motion.

Driving

Breaking-in notes

To preserve the engine during the first 1,000 miles (1,500 km):


- drive at varying road speeds and engine speeds.
- do not drive faster than 85 mph (140 km/h).
- allow the engine to reach a maximum engine speed of 4,500 rpm (4,500 rpm) only briefly.
- drive the vehicle in drive program **C**.
- change gear before the tachometer needle is $\frac{2}{3}$ of the way to the red area of the tachometer.
- do not shift down a gear manually in order to brake.
- avoid overstraining the vehicle, e.g. driving at full throttle.
- do not depress the accelerator pedal past the pressure point (kickdown).
- only increase the engine speed gradually and accelerate the vehicle to full speed after 1,000 miles (1,500 km).

This also applies when the engine or parts of the drivetrain have been replaced.

Please also observe the following breaking-in notes:

- In certain driving and driving safety systems, the sensors adjust automatically while a certain distance is being driven after the vehicle has been delivered or after repairs. Full system effectiveness is not reached until the end of this teach-in process.
- Brakepads, brake discs and tires that are either new or have been replaced only achieve optimum braking effect and grip after several hundred kilometers of driving. Compensate for the reduced braking effect by applying greater force to the brake pedal.

Function of Emotion Start



- Start the vehicle with the start/stop button and simultaneously pull one of the steering wheel gearshift paddles () or (2).
 - The idle speed is increased briefly when starting the engine.
 - The exhaust gas flaps are opened (sporty characteristic) (→ page 12).

Observe the notes on starting the vehicle in the vehicle Operator's Manual.

Operation of the ECO start/stop function

The engine is switched off automatically in the following situations if all vehicle conditions for an automatic engine stop are met:

you brake the vehicle to a standstill in transmission position D or N.

If you switch on the HOLD function in transmission position \underline{D} or \underline{N} , the engine will automatically stop in the following situations:

- you stop behind a vehicle that is pulling away.
- you stop at a stop sign when there is no vehicle in front of you.
- you turn the steering wheel hard at a low speed.
- (i) In transmission position **R**, the engine is not switched off automatically even when the HOLD function is switched on.

The engine is restarted automatically if:

• you release the brake pedal in transmission position **D** when the HOLD function is not

active and the vehicle does not start to move.

- you shift from transmission position **P**.
- you release the brake pedal and the vehicle starts to move on a gentle downhill gradient at a speed below 3 mph (5 km/h).
- you depress the accelerator pedal.
- you permanently activate manual gearshifting.
- you pull the left-hand steering wheel gearshift paddle.
- an automatic engine start is required by the vehicle.

If the engine was switched off by the ECO start/ stop function and you leave the vehicle, a warning tone sounds. In addition, the Vehicle Ready to Drive Switch the Ignition Off Before Exiting message appears in the multifunction display. If you do not switch off the ignition, the ignition is automatically switched off after one minute.


AMG Performance adjustable exhaust system

Function of the AMG Performance exhaust system

Changing the position of the exhaust gas flaps allows you to select the sound characteristics of the AMG Performance exhaust system:

- Closed exhaust gas flaps: comfort characteristic (balanced)
- Open exhaust gas flaps: sporty characteristic (powerful)

Operating the AMG Performance exhaust system



Press button ①.
 The sporty characteristic (powerful) is selected when indicator lamp ② lights up.

Notes for the AMG high-performance brake system and the AMG ceramic high-performance composite brake system

The brake system is designed for heavy loads. This may lead to noise when braking. This effect can also occur after washing the vehicle.

The noise depends on the following factors:

- Speed
- Brake force
- Environmental conditions, e.g. temperature and air humidity

Have the brake system checked at a qualified specialist workshop after it has been subjected to extreme use.

DYNAMIC SELECT switch

Function of the DYNAMIC SELECT switch

Use the DYNAMIC SELECT switch to change between the following drive programs:

- (Slippery): optimized pulling away and driving characteristics in wintry and slippery road conditions
- (Individual): individual settings
- C (Comfort): comfortable and economical driving style
- **S** (Sport): sporty driving style
- **S** (**Sport +):** particularly sporty driving style
- (RACE): driving like on a race track

The 🛐 (RACE) drive program may not be used on normal roads. 🛐 (RACE) must only be activated and used on dedicated race circuits, not on public roads.

Mercedes-AMG recommends selecting the drive program **C** when in city traffic or stop-and-go traffic.

Depending on the drive program selected, the following vehicle characteristics will change:

- Drive
 - Engine and transmission management
 - Active Distance Assist DISTRONIC
- ESP[®]
- Availability of the ECO start/stop function
- Position of the exhaust gas flaps
- Suspension
- Steering
- 4MATIC+ all-wheel drive
- The (RACE) drive program has the following properties:
 - The vehicle exhibits driving characteristics suited for the racetrack.
 - All vehicle systems are set for maximum sportiness.
 - The suspension exhibits particularly firm springing and damping settings.
 - Glide mode is not available.

- The sporty characteristic (Powerful) is activated when the exhaust system is activated.
- (i) You can change the following vehicle characteristics using the buttons in the center console:
 - Position of the exhaust gas flaps
 - Suspension
 - ESP[®]
 - Availability of the ECO start/stop function

Displaying dynamic data

Multimedia system:

- → Vehicle

 The provide The provided Address Select

 Vehicle

 The provided Address Select

 Comparison


 C
- Select Dyn. Data.

Dynamic data is displayed, e.g.:

- G-force values
- Torque distribution
- Boost
- Current power output

• Variable all-wheel drive

Automatic transmission Manual gearshifting




- To activate/deactivate: press button ①.
 If indicator lamp ② is lit, manual gearshifting is activated. The current gear is displayed in the multifunction display.
- (i) To permanently shift the gears manually in drive program [1] using the steering wheel gearshift paddles, select the **M** (Manual) setting for the transmission.
 - **NOTE** Damage to the engine due to shifting up too late


The automatic transmission does not shift up in manual mode even when the engine's limiting speed is reached.

The fuel supply is interrupted in order to prevent the engine from overrevving.

Shift up before the engine speed reaches the red area in the tachometer.




- **To shift up:** pull steering wheel gearshift paddle **2**.
- To shift down: pull steering wheel gearshift paddle ①.



If the engine speed is too high or too low, you cannot change gear using the steering wheel gearshift paddles. In this case, segments **()** light up red.

Gearshift recommendation

The gearshift recommendation assists you in adopting an economical driving style.



 If gearshift recommendation message () is shown on the multifunction display, shift to the recommended gear.

(i) Gearshift recommendation is active only if you have activated manual gearshifting with the button on the center console.

Using kickdown

Maximum acceleration: depress the accelerator pedal beyond the pressure point.

The automatic transmission shifts up to the next gear when the maximum engine speed is reached to protect the engine from overrevving.

(i) If you have activated manual gearshifting with the button in the center console, the transmission does not react to the kickdown. Driving and driving safety systems Functions of ESP[®] (Electronic Stability Program)

WARNING Risk of skidding if ESP[®] is malfunctioning

If ESP[®] is malfunctioning, ESP[®] cannot carry out vehicle stabilization. In addition, other driving safety systems are switched off.

- Drive on carefully.
- Have ESP[®] checked at a qualified specialist workshop.

You can select between the following modes of ESP^\circledast :

- ESP[®] ON
- ESP[®] SPORT
- ESP[®] OFF

Characteristics when ESP® is activated

ESP[®] monitors and improves driving stability and traction, particularly in the following situations:

- · When pulling away on a wet or slippery road.
- When braking.
- In strong side winds when you are driving faster than 47 mph (75 km/h).

 $\mathsf{ESP}^{\circledast}$ can stabilize the vehicle by intervening in the following ways:

- One or more wheels are braked.
- The engine output is adapted according to the situation.

 ESP^\circledast is activated every time the engine is started regardless of whether ESP^\circledast was in ESP^\circledast SPORT or deactivated before the engine was switched off.

If the 📑 ESP[®] warning lamp flashes in the instrument cluster, one or several vehicle wheels has reached its grip limit:

• Adapt the driving style to suit the prevailing road and weather conditions.

- Do not deactivate ESP[®] under any circumstances.
- Only depress the accelerator pedal as far as is necessary.

Characteristics of ESP® SPORT

WARNING Risk of skidding if ESP[®] SPORT is used incorrectly

When you activate $\mathsf{ESP}^{\circledast}$ SPORT, there is an increased risk of skidding and having an accident.

Activate ESP[®] SPORT only in the circumstances described below.

When ESP[®] SPORT is activated, the <u>Spr</u> and <u>warning lamps light up continuously in the</u> instrument cluster.

Select ESP[®] SPORT when the vehicle's own oversteering and understeering characteristics are desired, e.g. on designated roads.

Driving with ESP $^{\textcircled{B}}$ SPORT or with ESP $^{\textcircled{B}}$ deactivated requires an extremely qualified and experienced driver.

If ESP[®] SPORT is activated and one or more wheels start to spin, the \fbox ESP[®] warning lamp on the instrument cluster flashes. ESP[®] then only stabilizes the vehicle to a limited degree.

 $\mathsf{ESP}^{\circledast}$ SPORT also has the following characteristics:

- ESP[®] only improves driving stability to a limited degree.
- ETS/4ETS traction control is still active.
- The engine's torque is only restricted to a limited degree and the drive wheels can spin.

The spinning of the wheels results in a cutting action for better traction on loose surfaces.

- ESP[®] continues to provide assistance when the brakes are firmly applied.
- Crosswind Assist is no longer active.

Characteristics when $\mathsf{ESP}^{\texttt{®}}$ is deactivated

▲ WARNING Risk of skidding if ESP[®] is deactivated

If you deactivate ESP[®], ESP[®] cannot carry out vehicle stabilization.

 ESP[®] should only be deactivated in the following situations.

When ESP[®] is deactivated, the $\boxed{\mathbb{S}_{F}}$ and $\boxed{\mathbb{E}^{SP OFF}}$ warning lamps light up continuously in the instrument cluster.

Deactivating ESP[®] has the following effects:

- Driving stability will no longer be improved.
- The drive wheels could spin.
- ETS/4ETS traction control is still active.
- Crosswind Assist is no longer active.
- (i) Even when ESP[®] is deactivated, you are still assisted by ESP[®] when braking hard.

It may be best to activate ESP^{\circledast} SPORT or deactivate ESP^{\circledast} in the following situations:

- When using snow chains.
- In deep snow.
- On sand or gravel.
- (i) Spinning the wheels results in a cutting action, which enhances traction.
- (i) Activate ESP[®] as soon as the situations described above no longer apply. ESP[®] will otherwise not be able to stabilize the vehicle if the vehicle starts to skid or a wheel starts to spin.

If the \fbox{B} ESP[®] warning lamp lights up continuously even when ESP[®] is activated, ESP[®] is not available due to a malfunction.

Observe any information which may be displayed in the instrument cluster:

- Indicator and warning lamps
- Display messages


ETS/4ETS (Electronic Traction System)

ETS/4ETS traction control is part of ESP®.

ETS/4ETS can improve the vehicle's traction by intervening in the following ways:

- The drive wheels are braked individually if they spin.
- More drive torque is transferred to the wheel or wheels with traction.

Activating/deactivating ESP[®] (Electronic Stability Program)



The strument cluster.

- To deactivate ESP®: press and hold button
 (1) until the Comparison of the instrument cluster.
- To activate ESP®: briefly press button ①. The Correlation and ESPOFF warning lamps go out.

Observe the information on warning lamps and display messages which may be shown in the instrument cluster.

RACE START

Function of RACE START

RACE START enables optimal vehicle acceleration from a standstill. For this, a suitably highgrip road surface is required, the tires and vehicle must also be in good condition.

- (i) RACE START is only available after the vehicle has been broken in (\rightarrow page 11).
- (i) RACE START may not be used on normal roads. RACE START must only be activated and used on dedicated race circuits, not on public roads.

Be sure to read the safety notes and information on $\text{ESP}^{\circledast} \ (\rightarrow \text{page 16}).$

WARNING Risk of skidding and having an accident from wheels spinning

If you use RACE START, depending on the ESP^{\circledast} mode selected, there is an increased risk of skidding and having an accident.

Make sure that no persons or obstacles are in the close vicinity of your vehicle.

Activating RACE START Requirements:

- the driver's door is closed.
- the engine is running and the transmission and engine are at normal operating temperature.
- the front wheel is in the straight-ahead position.
- the vehicle is on level ground.
- the vehicle is stationary, the brake pedal is depressed (left foot) and the parking brake is released.

- the transmission is in position **D**.
- one of the drive programs S, S or
 Is selected (→ page 13).
- Rapidly depress the accelerator pedal fully. The engine speed increases.
- (i) If the activation conditions are not fulfilled, RACE START cannot be activated. The RACE START Not Possible See Operator's Manual message appears in the multifunction display.
- The RACE START Release brake to start message appears in the multifunction display.
- (i) In this phase you can adjust RACE START depending on the road conditions: you can vary the engine speed by pulling on one of the steering wheel gearshift paddles. The segments in the multifunction display flicker rapidly.
- i) If the brake pedal is not released after a short while, RACE START is canceled. The RACE START Canceled message appears in the multifunction display.

 Take your foot off the brake, but keep the accelerator pedal depressed.
 The vehicle pulls away at maximum acceleration. The RACE START Active message appears in the multifunction display.

RACE START is deactivated immediately if you release the accelerator pedal during RACE START or if any of the activation conditions are no longer fulfilled. The RACE START Canceled message appears in the multifunction display.

(i) After using it several times in short succession, RACE START is unavailable until a certain distance has been driven.

AMG adative sport suspension system

Function of the AMG adaptive sport suspension system

The AMG adaptive sport suspension system is an air suspension system with variable damping for improved driving characteristics. The allround level control system ensures the best possible suspension and constant ground clearance, even with a laden vehicle. When driving at speed, the vehicle is lowered automatically to improve driving safety and to reduce fuel consumption. You also have the option of manually adjusting the vehicle level.

The damping is set individually for each wheel and is affected by the following factors:

• Driving style, e.g. sporty

+)

- Road condition, e.g. bumps
- The individual selection of the drive program:


The AMG adaptive sport suspension system comprises:

- Air suspension for ground clearance irrespective of load.
- Automatic level control system
- Speed-dependent lowering to reduce fuel consumption
- Manually selectable high level setting for greater ground clearance
- ADS PLUS (Adaptive Damping System with constant damping force adjustment)
- DYNAMIC SELECT switch and level button
- Suspension setting button

Available suspension settings

Drive program	Characteristics
Comfort)	 The suspension setting is comfortable. The vehicle is set to the normal level. When driving at speeds of above 78 mph (125 km/h) the vehicle is lowered. When driving at speeds below 50 mph (80 km/h) the vehicle is raised again. 4MATIC+ is dynamically synchronized.
S (Sport)	 The suspension setting is firmer. The vehicle is set to the normal level. When driving at speeds of above 78 mph (125 km/h) the vehicle is lowered. When driving at speeds below 50 mph (80 km/h) the vehicle is raised again. 4MATIC+ is dynamically synchronized.
S (Sport Plus)	 The suspension setting is even firmer. The vehicle is set to the normal level. When driving at speeds of above 78 mph (125 km/h) the vehicle is lowered. When driving at speeds below 50 mph (80 km/h) the vehicle is raised again. 4MATIC+ is more dynamically synchronized.

Selecting the AMG adaptive sport suspension system setting



 COMFORT suspension setting: press button () repeatedly until indicator lamps (2) and (3) go out.

The AMG Suspension System COMFORT message appears in the multifunction display.

The driving characteristics of your vehicle are comfortable.

SPORT suspension setting: press button () repeatedly until indicator lamp () lights up.

The AMG Suspension System SPORT message appears in the multifunction display.

The suspension is adapted to be firmer.

SPORT+ suspension setting: press button repeatedly until indicator lamps 2 and light up.

The AMG Suspension System SPORT + message appears in the multifunction display.

The vehicle is lowered to low level and the suspension is set to very firm.

Setting the vehicle level

WARNING Risk of accident because vehicle level is too high

Driving characteristics may be impaired. The vehicle can drift outwards, for example, when steering or cornering.

- Choose a vehicle level which is suited to the driving style and the road surface conditions.
- WARNING Risk of entrapment from vehicle lowering

When lowering the vehicle, people could become trapped if their limbs are between the vehicle body and the tires or underneath the vehicle.

- Make sure no one is underneath the vehicle or in the immediate vicinity of the wheel arches when the vehicle is being lowered.
- **WARNING** Risk of becoming trapped due to the vehicle lowering

Vehicles with AIR BODY CONTROL or level control system: when you unload luggage or leave the vehicle, the vehicle first rises slightly and then returns to the set level shortly afterwards.

You or anyone else in the vicinity of the wheel arches or the underbody could thus become trapped.

The vehicle can also be lowered after being locked.

When leaving the vehicle, make sure that nobody is in the vicinity of the wheel arches or the underbody.

Requirements:

- The vehicle has been started.
- The vehicle must not be moving faster than 50 mph (80 km/h).

Raising the vehicle

Press button ①. The vehicle is set to the high level.

Your selection is saved.

The vehicle is lowered again in the following situations:

 When driving faster than 75 mph (120 km/h).

- When driving between 50 mph (80 km/h) and 75 mph (120 km/h) for approximately three minutes.
- After selecting a drive program using the DYNAMIC SELECT switch.


The vehicle is adjusted to the height of the last active drive program.

Lowering the vehicle

Press button ①.

The vehicle is adjusted to the height of the last active drive program.

Function of the AMG steering-wheel buttons



The AMG steering-wheel buttons are two additional control elements on the steering wheel.

You can assign two vehicle functions of your choice to the left control element. You can change between the available functions by pressing display buttons (2) repeatedly. The currently selected functions are displayed in display buttons (2).

The following functions are available:

• $ESP^{\mathbb{R}}(\rightarrow page 16)$

- AMG adaptive sport suspension system (\rightarrow page 20)
- AMG Performance exhaust system (→ page 12)
- ECO start/stop function (\rightarrow page 12)
- Manual gearshifting (\rightarrow page 14)

If you have assigned a function to one of display buttons (2), you can operate this function with corresponding button (1).

The assignment of display button ② remains stored even after a new engine start, but the operating status of the respective function is reset to the basic setting.

You can change between the drive programs with stabilizer bar actuator (a). The selected drive program appears in display button (b). By pressing display button (c), you can directly access the drive program [1] (Individual) (\rightarrow page 13).

Notes on the Instrument Display and onboard computer

Additional notes regarding your Mercedes-AMG vehicle:

- If you select the Performance menu, the upshift bar will appear on the multifunction display.
- If you switch on the ECO start/stop function and select drive program , the engine electronics will switch from eight-cylinder mode to four-cylinder mode, if necessary. The multifunction display will show the symbol in the status area.
- Additional note regarding the indicator and warning lamps: the vehicle is also equipped with the ESP[®] , ESP[®] OFF , and ESP[®] SPORT server indicator and warning lamps (→ page 44).
- You can select the following display content in Mercedes-AMG vehicles with a Widescreen Cockpit:
 - Tachometer (classic display setting)

- Tachometer and gear display (classic display setting)
- Date (progressive display setting)
- Date and gear display
- Warm-up
- Engine data
- G-meter
- Trip computer
- Navigation

Operating the on-board computer


 WARNING Risk of distraction from information systems and communications equipment

If you operate information and communication equipment integrated in the vehicle when driving, you will be distracted from the traffic situation. This could also cause you to lose control of the vehicle.

- Only operate this equipment when the traffic situation permits.
- If you cannot be sure of this, stop the vehicle whilst paying attention to road and traffic conditions and operate the equipment with the vehicle stationary.

Observe the legal requirements for the country in which you are currently driving when operating the on-board computer.

i) The on-board computer displays will appear on the multifunction display.



The on-board computer is operated using lefthand Touch Control (3) and left-hand back/ home button (2).

The following menus are available:

- Service
- DriveAssist
- Performance
- Trip

- Navigation
- Radio
- Media
- Phone
- Head-up Disp.

The menus can be called up from the menu bar on the multifunction display.

 To call up the menu bar: press back button on the left ② until the menu bar is displayed.



 To scroll in the menu bar: swipe left or right on left-hand Touch Control (3).

- **To call up a menu or confirm a selection:** press left-hand Touch Control **(3)**.
- To scroll through displays or lists on the menu: swipe upwards or downwards on lefthand Touch Control (3).
- **To call up a submenu or confirm a selec-tion:** press left-hand Touch Control (3).
- **To exit a submenu:** press back button on the left **(2)**.

Selecting the Head-up Display

If the Head-up Display is switched off: press button ().

The Head-up Display will be switched on.

or

If the Head-up Display is switched on: swipe upwards on the left-hand Touch Control (3).

The Head-up Display will be activated.

 To select what the Head-up Display shows: swipe upwards or downwards on the left-hand Touch Control (3).

Calling up displays on the Performance menu

On-board computer:

→ Performance

To select a display: swipe upwards or downwards on the left-hand Touch Control.

Displays on the Performance menu:

- Warm-up
- SETUP
- G-meter
- RACE TIMER
- Engine data



Warm-up (example)

- Digital speedometer
- 2 Gear display
- Ingine oil temperature
- Iransmission oil temperature
- 6 Boost pressure

If the engine or transmission are not at normal operating temperature, the multifunction display

will show temperature (3) or (2) in blue. Avoid using the full engine power output during this time.



Example: SETUP in Mercedes-AMG vehicles

- Drive system setting: Reduced/Moderate/Sport/Dynamic
- Exhaust system: Balanced/Powerful
- 3 ESP[®]:
 - On/Sport/Off
- Transmission position:

D/M





G-meter (example)

While the vehicle is in motion, the G-meter shows the forces that are exerted on the vehicle occupants both laterally and in the direction of travel. The maximum values appear in red in the coordinate system.

- **To reset the G-meter:** press the left-hand Touch Control.
- Select Yes.
- Press the left-hand Touch Control.

If you press and hold the left-hand Touch Control, the function will be reset immediately.



- Engine data (example)
- Current power output
- Ourrent torque

Displaying and starting RACE TIMER on the Performance menu

On-board computer:

- → Performance
- (i) The RACE TIMER function is available only in vehicles without AMG TRACK PACE.

The following functions are possible in RACE TIMER:

- Displaying and starting
- Stopping
- Starting a new lap
- Displaying lap statistics
- Resetting



Lap
 Lap time

RACE TIMER is intended only for use on designated race tracks. Do not use the function on public roads.

- **To select a display and start:** swipe up or down on the left-hand Touch Control.
- Press the left-hand Touch Control.
- Select Start and press the left-hand Touch Control.
- To stop: select Stop and press the left-hand Touch Control.
- **To start a new lap:** after the first stored lap, press the left-hand Touch Control.
- Select New Lap. A maximum of 32 laps may be stored.



- Example: RACE TIMER
- 1 Lap
- 2 Elapsed time
- Average speed
- Oistance covered
- To display the lap statistics: after at least two stored laps, press the left-hand Touch Control.
- Select Lap List.
 The lap statistics will be displayed.

 Display the statistics of the next lap by swiping up or down on the left-hand Touch Control.

The fastest lap is indicated by flashing symbol (1).


- **To reset:** stop RACETIMER and press the left-hand Touch Control.
- Select Reset and press the left-hand Touch Control.

All laps will be deleted.

Function of the Head-up Display

The Head-up Display projects information from the navigation system and the driver assistance system above the cockpit into the driver's field of vision.

Mercedes-AMG display content



- Protection from reaching the overrevving range
- Ourrent engine speed
- Ourrent speed
- Currently selected gear, gearshift options with manual shifting
- Index points

Depending on the vehicle's equipment, you can select further AMG displays in addition to the standard displays on the Display Content menu. If you select RACE TIMER, the Head-up Display will show the lap and lap time. When you receive a call, the *C* Incoming Call

- message appears on the Head-up Display.

System limits

The visibility is influenced by the following conditions:

- Seat position
- Image position setting
- Ambient light
- Wet road surfaces
- Objects on the display cover
- Polarization in sunglasses

AMG TRACK PACE

General information

With AMG TRACK PACE, the driving characteristics on race tracks can be analyzed and optimized. You can drive previously stored race tracks (e.g. Hockenheimring), or new tracks can be recorded and stored. The driven lap times are stored for every track. These can be analyzed and compared to other lap times to achieve the best possible race results. Additionally, acceleration and braking procedures can be measured and stored.

Please note: Use AMG TRACK PACE only on closed-off routes outside the public traffic area. Adapt your driving style to your personal abilities and the environmental conditions. As the driver, you are solely responsible for driving your vehicle. Park your vehicle safely before operating the application.

Setting Track Race

Multimedia system:

→ Vehicle >> TRACK PACE >> Track Race

Recording a track

- Select New track.
- At the desired starting point, select Start. The track recording starts at this point. During track recording, sectors can be set to determine intervals.
- To finish track recording, select Stop or cross the starting line again.
- Enter the weather and the track name.

Searching by track name

- Select All tracks.
 - Select Search.
 - Enter the track name. Tracks with the searched name are displayed.

Measuring the time on the track

 Select Timekeeping. An overview of nearby tracks appears. The distance and direction to the starting line of the track is displayed.

Select the desired track. If you have already driven on this track, you can select a driven time as a reference time.

Timekeeping begins automatically when the starting line has been crossed.

(i) When Zoom is selected, the track display can be switched from 2D to 3D.

Displaying the analysis

- Select Lap times. An overview of all the driven tracks appears.
- Select a track.

The following data is displayed:

- Lap and sector times
- · Average and maximum permissible speed
- Driver
- Vehicle
- Date
- Weather

32 Multimedia system

 Select a desired lap. The analysis is displayed.



- Parameter 1 (e.g. speed)
- Parameter 2 (e.g. steering angle)
- Speed trend (Parameter 1)
- Steering angle trend (Parameter 2)
- Time difference between lap A and B (only when two laps are selected).
- (i) The following values can be set for parameters 1 and 2, for example:
 - Speed
 - Longitudinal/lateral acceleration

- Steering angle
- Engine speed
- Engine oil/tire temperature

Based on the analysis you can check and optimize driving characteristics for any position on the track.

Exporting tracks or races (USB)

- Select All tracks. An overview of all stored tracks and races appears.
- Highlight desired tracks or races.
- Select Select
- Select Export.

The selected tracks or races can be exported to a USB storage device connected to the vehicle.

Editing tracks and recordings

- Select All tracks.
- Highlight the desired track.
- Select 🔙 options.
- Select Rename or Delete.

- or
- Select a track.
- Highlight the desired recording.
- Select Select options.
- Select Weather or Delete.

Setting Drag Race

Multimedia system:

→ Vehicle >> TRACK PACE >> Drag Race

Measuring acceleration

Select Acceleration.

Measurement begins when the vehicle accelerates. Measurement is incremental, in steps of 30 mph (50 km/h) to a maximum of 180 mph (300 km/h) or up to the set maximum speed.

Measurement can be stopped early by selecting Stop or by stopping the vehicle.

Quarter-mile race

Select Quarter Mile.

The time measurement runs until a mile has been traveled or a previously set distance (e.g. 1/4 mile, 1/3 mile or 1/2 mile) has been reached.

(i) The possible values for setting the end distance are determined by the system and cannot be freely chosen.

Measurement can be stopped early by selecting Stop or by stopping the vehicle.

Manual start for acceleration and quartermile race

Select Acceleration or Quarter Mile.

Select Manual start.

Three red traffic lights appear one after the other. The reaction time measurement starts when they change to green at the same time. The reaction time is displayed as soon as you drive off. If you drive off too early, the message Jump start will appear and acceleration or quarter mile measurement will be canceled.

Measuring braking

- Select Braking.
- Select Start Record.

Measurement is incremental, in steps of 30 mph (50 km/h) to a standstill. If the braking procedure is started e.g. at a speed of 99 mph (160 km/h), measurement starts as soon as 90 mph (150 km/h) has been reached.

Storing and calling up measurement values

When a measurement has been completed or canceled, the measured time can be stored.

After a measurement, select Save measurement?.

The stored measurements can be displayed via the History menu item.

Editing measurements

- Select History.
- Highlight the desired measurement.
- Select 🛏 options.
- Select Weather or Delete.

(i) The measurements can be displayed by category, e.g. acceleration measurements, by applying a filter.

Calling up the telemetry display

Multimedia system:

→ Vehicle >> TRACK PACE >> Telemetry

The telemetry display shows current vehicle data as a digital value and as a diagram. Up to four parameters can be selected that are to be shown in the display.

For example:

- · Engine speed
- Wheel angle
- Speed
- Steering angle
- Set the desired parameters.
- Set the time.

The set parameters are evaluated in the diagram for the time set.

34 Multimedia system

(i) The time can range between 30 seconds and a maximum of 20 minutes.

Configuring AMG TRACK PACE

Requirements

To use the TRACK PACE app:

- the TRACK PACE app is installed on the mobile end device.
- the mobile end device is connected to the multimedia system via Wi-Fi.

Multimedia system:

→ Vehicle >> TRACK PACE >> Options

Setting driver profiles

- Select Driver Profile.
- Create a new driver profile.
- or
- Select an existing driver profile. The driver profile is activated.
- (i) Tracks, laps and times driven are assigned to the active driver profile while driving. For an exact evaluation of your driving style, you

should always drive with an active driver profile.

Displaying driver profile statistics

- Select Driver Profile.
- Select the desired profile.

The following information is displayed for the selected driver profile:

- Driving time
- Track driven
- Number of Track Races, Drag Races and laps driven
- Maximum speed

Connecting a mobile device via the TRACK PACE app

The TRACK PACE app makes it possible to record videos and to synchronize them with stored tracks.

- Select the TRACK PACE app. Already authorized devices are displayed in the list.
- Select Authorize new device. Available devices are displayed.

- Start the TRACK PACE app on the device to be connected and follow the instructions.
- Confirm the authorization prompt.
- Enter the code displayed on the device. The device is authorized.

or

Select a device that is already authorized.
 The device is de-authorized.

Setting the TRACK PACE display in the headup display

- Select HUD Contents.
- ► Activate ☑ or deactivate □ the desired contents.

The contents in the Head-up Display are adapted.

(i) For further information on the Head-up Display, see (\rightarrow page 29).

Setting acoustic feedback

Select Acoustic feedback.

The following settings are available:

Loud

- Medium
- Quiet
- Off
- Select a setting.

Activating/deactivating additional information

► Activate 🗹 or deactivate 🗌 Display help.

When additional information is activated, popups provide information on the individual menus.

 Confirm popups with OK or select Do not display.

Calling up information

Select Info.

The following information is displayed:

- Software version
- Memory used
- Total number of tracks saved
- Total number of races driven

36 Breakdown assistance

Flat tire

TIREFIT kit storage location

The TIREFIT kit is located under the trunk floor.

Depending on the equipment, the position of the TIREFIT kit in the trunk floor can vary.



Tire sealant bottle
 Tire inflation compressor


Overview of the tire-change tool kit

Apart from some country-specific variants, vehicles are not equipped with a tire-change tool kit. For more information on which tire-changing tools are required and approved for performing a wheel change on your vehicle, consult a qualified specialist workshop.

Required tire-change tool kit may include, for example:

- Jack
- Chock
- Lug wrench
- Alignment bolt

The tire-change tool kit is in a well in the stowage space under the trunk floor.



- Folding chock
- 2 Ratchet
- 3 Socket
- Lug wrench
- Towing eye
- Jacking support
- Jack
- Alignment bolt

Changing a wheel

 Be sure to also observe the notes on changing a wheel in the Operator's Manual of your vehicle.

Vehicles with AMG ceramic high-performance composite braking system:

NOTE Damage to the ceramic brake disk when changing a wheel


Mercedes-AMG vehicles with ceramic brake disks: during removal and repositioning of the wheel, the wheel rim may strike the ceramic brake disk and damage it.

- Take particular care.
- Ask another person for assistance or use a second centering pin.
- When changing the wheel, avoid exerting any force on the brake discs.
 This can lead to impaired comfort during braking.

Installing/removing the longitudinal member panel

To protect the vehicle body, the vehicle has covers installed next to the jack support points on the longitudinal member panels.

38 Wheels and tires



Fold cover ① upwards.

Operating fluids

Fuel

Notes on fuel grades for Mercedes-AMG vehicles

Observe the information on service products in the vehicle Operator's Manual.

NOTE Damage caused by the wrong fuel

Even small amounts of the wrong fuel could result in damage to the fuel system, the engine and the emission control system.

Only refuel with low-sulfur gasoline.

This fuel may contain up to 10% ethanol by volume. Your vehicle is suitable for use with E10 fuel.

Never refuel with one of the following fuels:

- Diesel
- Gasoline with more than 10% ethanol by volume, e.g. E15, E85, E100

- Gasoline with more than 3% methanol by volume, e.g. M15, M30, M85, M100
- Gasoline with additives containing metal

If you have accidentally refueled with the wrong fuel:

- do not switch the ignition on.
- Consult a qualified specialist workshop.

If the available fuel is not sufficiently low in sulfur, this can produce unpleasant odors.

Only refuel using unleaded premium grade gasoline with at least 91 AKI/95 RON.

As a temporary measure, if the recommended fuel is not available, you may also use unleaded regular gasoline. Octane number on the vehicle on the information label in the fuel filler flap (see the vehicle's Operator's Manual). This may reduce engine output and increase fuel consumption.

Never refuel using gasoline with an even lower RON.

NOTE Premature engine wear through unleaded regular gasoline

Impairment of the longevity and performance of the engine.

If unleaded premium grade gasoline is unavailable and you have to refuel using unleaded regular gasoline:

- Only fill the fuel tank to half full with unleaded regular gasoline and refill as soon as possible with unleaded premium grade gasoline.
- Do not drive at the maximum design speed.
- Avoid sudden acceleration and engine speeds over 3000 rpm.

Further information on fuel is available at the following locations:

- At a gas station
- At a qualified specialist workshop
- USA only: at https://www.mbusa.com

Tank content and fuel reserve

Coupe/Convertible	Total capacity
All models	21.1 gal (80.0 liters)
	of which reserve fuel
All models	2.1 gal (8.0 liters)

Quality and capacity of engine oil

Coupe/Convertible	MB-Freigabe or MB- Approval
Mercedes-AMG S 63	229.5*
4MATIC+	229.51

* Recommended for lowest possible fuel consumption (lowest SAE viscosity class in each case; observe possible restrictions of the approved SAE viscosity classes).

To achieve the lowest possible fuel consumption, it is recommended to use the engine oil specifications marked in the table for the lowest SAE viscosity class. Possible restrictions of the approved SAE viscosity classes must be observed.

Only use SAE 0W-40 or SAE 5W-40 engine oils. The following values refer to an oil change, including the oil filter.

Coupe/Convertible	Capacity
Mercedes-AMG S 63 4MATIC+	9.5 US qt (9.0 liters)

Cool	ant	capacity

Coupe/Convertible	Capacity
Mercedes-AMG S 63	14.8 US qt
4MATIC+	(14.0 liters)

Filling capacity for refrigerant and PAG oil


Coupe/Convertible	Refrigerant
All models	23.3 ± 0.4 oz (660 ± 10 g)
Coupe/Convertible	PAG oil

Vehicle data

Vehicle dimensions

The heights specified may vary as a result of the following factors:

- Tires
- Load
- Condition of the suspension
- Optional equipment



Coupe/Convertible	Height when opened
Coupe	69.1 in (1755 mm)
Convertible	65.5 in (1663 mm)

Vehicle dimensions

Coupe/Convertible	
Vehicle length	198.9 in (5051 mm)
Vehicle width including out- side mirrors	83.0 in (2108 mm)
Vehicle height	56.2 in (1428 mm)
Wheelbase	115.9 in (2945 mm)
Turning radius	39.4 ft (12 m)

Weights and loads

Please observe the following notes for the specified vehicle data:

• Items of optional equipment increase the curb weight and reduce the payload.

Coupe/Convertible

Maximum roof load	0 lb (0 kg)
(all models)	

Maximum design speeds

The following values only apply to vehicles with the AMG Driver's Package.

Maximum design speeds

	Mercedes-AMG S 63 4MATIC+ (Coupe & Convertible)
1st gear	41 mph (69 km/h)
2nd gear	66 mph (106 km/h)

	Mercedes-AMG S 63 4MATIC+ (Coupe & Convertible)
3rd gear	98 mph (158 km/h)
4th gear	137 mph (221 km/h)
5th gear	183 mph (294 km/h)
6th gear	186 mph (300 km/h)
7th gear	186 mph (300 km/h)
8th gear	186 mph (300 km/h)
9th gear	186 mph (300 km/h)

Display messages	Possible causes/consequences and > Solutions
RACE START Not Possible See Operator's Manual	 * Possible causes: The activation conditions have not been fulfilled (→ page 19).
RACE START Canceled	 * Possible causes: You released the accelerator pedal during RACE START. You depressed the brake pedal during RACE START. You can try RACE START again at the next start.
Malfunction Drive at Max. 50 mph	 * The AMG adaptive sport suspension system is malfunctioning. The vehicle's handling characteristics may be affected. Do not drive at speeds greater than 50 mph (80 km/h). Consult a qualified specialist workshop.

44 Display messages and warning/indicator lamps

Warning and indicator lamps Driving systems		
Warning/indicator lamp	Possible causes/consequences and > Solutions	
Suspension warning lamp (yellow)	 The yellow AMG adaptive sport suspension system warning lamp is lit. * There is a malfunction in the AMG adaptive sport suspension system. Note the messages on the multifunction display. 	

Driving safety systems

Warning/indicator lamp	Possible causes/consequences and > Solutions
OFF	The yellow ESP [®] OFF warning lamps are lit while the engine is running. *ESP [®] is deactivated. Other driving systems and driving safety systems may also be inoperative.
ESP OFF	WARNING Risk of skidding when driving with ESP [®] deactivated
	ESP [®] does not act to stabilize the vehicle. The availability of further driving safety systems is also limited. Drive on carefully.

Warning/indicator lamp	Possible causes/consequences and > Solutions
	 Deactivate ESP[®] only for as long as the situation requires. If ESP[®] cannot be activated, ESP[®] is malfunctioning. Have ESP[®] checked immediately at a qualified specialist workshop.
	> Observe the notes on deactivating ESP [®] (\rightarrow page 16).
OFF	ESP [®] SPORT is activated while the engine is running. *When ESP [®] SPORT is activated, ESP [®] will stabilize the vehicle only to a limited extent.
	WARNING Risk of skidding if ESP [®] SPORT is used incorrectly
ESP SPORT	When you activate ESP [®] SPORT, there is an increased risk of skidding and having an accident. Activate ESP[®] SPORT only in the circumstances described below.
	block

Α

Acceleration

see Kickdown

AMG		
Menu (on-board computer)	25	
Steering wheel control element	24	
Steering-wheel buttons	24	
AMG adaptive sport suspension sys-		
tem	22	
Selecting the suspension setting	22	
Setting	22	
Suspension	20	
AMG ceramic high-performance com-		
posite brake system	13	
AMG high-performance brake system	13	
AMG Performance adjustable exhaust		
system	12	
Function	12	
Operating	12	
AMG Performance steering wheel	24	
AMG TRACK PACE		
Configuring	34	
Drag Race	32	

General information Telemetry display Track Race	31 33 31
Authorized Mercedes-Benz Center see Qualified specialist workshop	
Authorized workshop see Qualified specialist workshop	
Automatic engine start (ECO start/ stop function)	12
Automatic engine stop (ECO start/ stop function)	12
Automatic transmission Drive programs DYNAMIC SELECT switch Kickdown Manual gearshifting Oil temperature (on-board computer, Performance menu) Steering wheel paddle shifters	13 13 16 14 27 14
n	

Boost pressure (on-board computer, Performance menu) 27

Brakes

AMG ceramic high-performance	
composite brake system	13
AMG high-performance brake system	13
New/replaced brakepads/brake discs	11
Notes on breaking-in a new vehicle	11

С

Changing a wheel	
Installing/removing the longitudinal	
member panel	37
Removing a wheel	37
Changing gears	14
Manually	14
Chock	37
Storage location	37
Chock	
see Chock	
Climate control	
Filling capacity for PAG oil	40
Refrigerant filling capacity	40
Cockpit	4
Overview	4

Comfort mode

see AMG adaptive sport suspension system

Computer

see On-board computer

Coolant (engine)

Capacity 40

D

Dashboard

see Cockpit

Dealership

see Qualified specialist workshop

Display messages

🏮 Malfunction Drive at Max. 50
mph
RACE START Canceled
RACE START Not Possible See Oper-
ator's Manual
-

43 43

43

Drag Race

Setting		32
---------	--	----

Drive programs

see DYNAMIC SELECT

Driving safety system	17
ESP [®] (Electronic Stability Program)	16
Driving system	
AMG adaptive sport suspension sys-	
tem	20
Driving tips	
AMG ceramic high-performance	
composite brake system	13
AMG high-performance brake system	13
Notes on breaking-in a new vehicle	11
Dynamic data	
Displaying	14
DYNAMIC SELECT	13
Drive programs	13
Function	13
E	
E10	39
ECO start/stop function	12
Automatic engine start	12
Automatic engine stop	12
Method of operation	12

Emotion Start	
Starting the vehicle	11
Engine ECO start/stop function	12
Engine oil Capacity MB-Freigabe or MB-Approval Quality Temperature (on-board computer, Performance menu)	40 40 40 27
ESP® (Electronic Stability Program) Activating/deactivating ESP® SPORT Function/notes Status display (on-board computer, Performance menu)	18 16 16 27
ESP [®] SPORT Function/notes	16
F	
Fuel	30

E10	39
Fuel reserve	40
Gasoline	39

Quality (gasoline)	39
Sulfur content	39
Tank content	40
	10

G

G-meter (on-board computer, Per-	
formance menu)	27
Gasoline	39
Gear display (on-board computer, Per-	
formance menu)	27
Gearshift recommendation	15

Н

Head-up Display

Function (Mercedes-AMG vehicles) 29

Instrument display

	AMG displays	 25
J		
Jac		

К	
Kickdown	16
Using	16
L	
Limited Warranty	
Vehicle	9
м	

Maximum speeds	••••	41
Menu (on-board computer)		
AMG displays Overview		
Performance		

Ν

Notes on breaking-in a new vehicle 11

0

С

On-board computer	25
AMG menu	
Operating	25
Overview of menus	25

Performance menu 25, 27
Operating fluids Fuel (gasoline)
Operating safety Information 7
Operating system see On-board computer
Operator's Manual Vehicle equipment 7
Ρ
P Performance (on-board computer, Performance menu) 27
Performance (on-board computer,
Performance (on-board computer, Performance menu) 27 Power output (on-board computer,
Performance (on-board computer, Performance menu) 27 Power output (on-board computer,

RACE START

Activating	 19
Activation conditions	 19

Function	19
RACETIMER (on-board computer, Per- formance menu)	28
Reserve Fuel	40
Roof load	41

S

Seat belt extender	10
Seat belts	
Reduced protection Seat belt extender	10 10
Selecting a gear see Changing gears	
Service center	
see Qualified specialist workshop	
SETUP (on-board computer, Perform-	
ance menu)	27
Shift paddles	
see Steering wheel paddle shifters	
Shifting gears	
Gearshift recommendation	15

Specialist workshop	8
Sport Plus suspension setting see AMG adaptive sport suspension system	1
Sport suspension setting see AMG adaptive sport suspension system	1
Sports exhaust see AMG Performance adjustable exhaust system	
Start/Stop button Emotion Start	11
Start/stop function see ECO start/stop function	
Steering wheel paddle shifters	14
Sulfur content 3	39
Selecting the suspension setting 2 Setting the suspension level 2	20 22 22
Setting 2	22

Tank content	
Fuel	40
Reserve (fuel)	40
Telemetry display	
Calling up	33
Temperature	
Engine oil (on-board computer, Per-	
formance menu)	27
Transmission oil (on-board computer,	~7
Performance menu)	27
Tire inflation compressor	
see TIREFIT kit	
Tire-change tool kit	
Overview	37
TIREFIT kit	36
Storage location	36
Tires	
Installing	37
Removing	37
Tool	
ana Mahiala taal kit	

see Vehicle tool kit

Torque (on-board computer, Perform- ance menu)	27
Touch Control On-board computer	25
Track Race Setting	31
Trunk lid Opening dimensions	40

ν

Vehicle

Correct use	8
Equipment	7
Limited Warranty	9
Qualified specialist workshop	8
Starting (Emotion Start)	11
Vehicle data	
Maximum speeds	41
Roof load	41
Turning circle	40
Vehicle height	40
Vehicle length	40
Vehicle width	40

Wheelbase 40

27	Vehicle tool kit TIREFIT kit	36 36
25	W	
31	Warm-up (on-board computer, Per- formance menu)	27
40	Warning/indicator lamp	
	🔹 Suspension warning lamp (yel- low)	44
8	Warranty	9
7 9	Wheel change Mounting a new wheel	37
8 11	Wheels Installing Removing	37 37
41 41 40	Workshop see Qualified specialist workshop	

Vehicle dimensions 40



