

Maintenance Booklet 2005 Passenger Cars E-Class (except AMG models)




PLEASE NOTE

WE STRONGLY RECOMMEND THAT YOU HAVE YOUR VEHICLE SERVICED BY YOUR AUTHORIZED MERCEDES-BENZ CENTER WHO IS FULLY EQUIPPED TO PROVIDE THIS SERVICE AND THAT GENUINE MERCEDES-BENZ PARTS BE USED.

THE USE OF DEFECTIVE OR NON-EQUIV-ALENT PARTS MAY RESULT IN YOUR EMISSION PERFORMANCE WARRANTY CLAIM BEING DENIED.

SERVICE, REPLACEMENT, OR REPAIR OF THE EMISSION CONTROL DEVICES AND SYSTEMS CAN BE PERFORMED BY ANY AUTOMOTIVE REPAIR ESTABLISHMENT OR INDIVIDUAL USING CERTIFIED PARTS.

Vehicle data

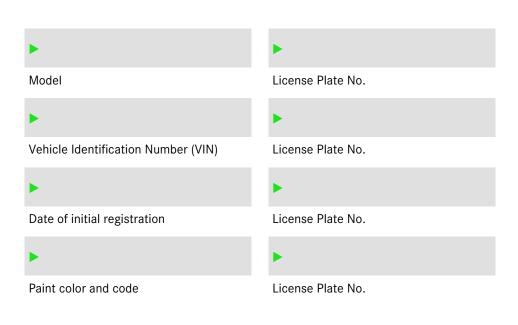

Protecting the environment



Natural resources form the basis of our existence on this planet. The objectives of our policy are for these resources to be used sparingly and in a manner which takes the requirements of both nature and humanity into account.

Our declared policy is integrated environmental protection. This policy starts at the root causes and encompasses in its management decisions all the consequences for the environment which could arise from production processes or the products themselves.

You too can help to protect the environment by operating your Mercedes-Benz in an environmentally responsible manner.

Operating conditions and your individual driving style to a large extent influence fuel consumption and the rate of engine, brake, and tire wear. To reduce fuel consumption and the rate of wear, please consider the following:

- · Avoid short trips.
- Make sure that the tire pressures are always correct.
- Avoid frequent, abrupt acceleration.
- Do not carry any unnecessary weight.
- Remove ski holders and roof racks once you no longer need them.
- Do not warm up the engine with the car stationary.
- Shift gears such that each gear is used only up to 2/3 of its maximum engine speed.
- Keep an eye on the vehicle's fuel consumption.

A regularly serviced vehicle will also help protect the environment. You should adhere to the maintenance intervals displayed by the Maintenance System service indicator, along with other maintenance work described in this booklet.

We recommend that you have maintenance services performed by an authorized Mercedes-Benz Center using Genuine Mercedes-Benz parts.

Contents

ntroduction Mercedes-Benz Maintenance System. 4 Regular checks	Maintenance d Maintenance c First visit Tire rotations. Maintenance s Recommended checks at 143
Emission system maintenance Gasoline Engines	Emission Syste
Confirmations	

escriptions

Maintenance overview E-Class	50
First visit	52
Tire rotations	52
Maintenance services 1-14	52
Recommended high-mileage	
checks at 143,000 miles	59
Emission System Maintenance	
Jobs	62

Introduction

We want you to enjoy your Mercedes-Benz automobile. Vehicle safety and operational reliability are two very important factors and to maintain them, regular maintenance services are necessary.

We continuously strive to improve our product, and ask for your understanding that we reserve the right to make changes in the required periodic maintenance work which is required for our vehicles.

Your Mercedes-Benz comes equipped with the Mercedes-Benz Maintenance System. The Maintenance System tracks distance driven and the time elapsed since your last service. In addition, it calculates other maintenance work required. The next necessary maintenance service is indicated in the multifunction display in the instrument cluster.

The maintenance services will be indicated by showing a service type A through type H in the multifunction display. Types A through H are classified based on the

estimated time needed to perform the maintenance service, ranging from up to approximately one hour (type A) to up to approximately eight hours (type H). When scheduling a maintenance appointment with your authorized Mercedes-Benz Center, always indicate the service type that appears in the multifunction display. This will help the Mercedes-Benz Center to schedule your vehicle maintenance in the most efficient manner.

A "+" sign after the service type display indicates that the brake lining thickness must be checked in addition to the other required maintenance services at the service displayed.

The Maintenance System calculates and determines the service items (items 1-14) that need to be performed. Based on these service items, the system then assigns the appropriate service type (type A through type H) which appears in the multifunction display.

Introduction

When the service type appears in the multifunction display, you can use the vehicle's control system to view a list of the service items (1-14) that need to be performed at the called for service type. See "Maintenance" in your Operator's Manual on how to view the service items. A descriptive listing of the service items 1-14 are contained in this booklet, starting on page 52. Following each maintenance service, your Mercedes-Benz Center will reset the Maintenance System service indicator by confirming the service items performed.



If the Maintenance System maintenance service counter was inadvertently reset, have a Mercedes-Benz Center correct it. Please only reset if the proper maintenance service has been performed. Resetting the system without performing the proper maintenance service will result in engine and/or other vehicle damage not covered by the Mercedes-Benz Limited Warranty.

Tire rotation - Your vehicle's tires are a critical component to overall vehicle performance and vehicle stability. The useful life of tires will vary and is proportional to tire type, speed rating, ambient conditions, tire loading, tire inflation pressure, road surfaces, and individual driving style, among other factors. Therefore, Mercedes-Benz recommends regular checks for wear and proper inflation and, if applicable to your vehicle's tire configuration, tire rotation.

Tire rotation can be performed on vehicles with the same tire dimensions all around. If your vehicle is equipped with the same tire dimensions all around, tires can be rotated by observing a front-to-rear rotation pattern that will maintain the intended rotation (spinning) direction of the tire (on unidirectional tires, an arrow on the sidewall indicates the intended rotation or spinning direction of the tire). In some cases, such as when your vehicle is configured with staggered-size (different tire sizes, front vs. rear), tire rotations are not possible.

Introduction

If your vehicle's tire configuration allows for tire rotation, tire rotation should be performed in accordance with the tire manufacturer's recommended intervals, or sooner at first signs of irregular (uneven) tread wear. Tire manufacturer's rotation recommendations will necessitate a tire rotation at least once in between maintenance services and at every maintenance service based on Mercedes-Benz maintenance intervals.

The first tire rotation, so long as it occurs before 6,500 miles (vehicle odometer), will be provided at no charge by an authorized Mercedes-Benz Center courtesy of Mercedes-Benz.

Should a tire rotation not be possible for your vehicle's tire configuration, an authorized Mercedes-Benz Center will check your tires for proper tire inflation pressure and perform a tread inspection, also at no charge courtesy of Mercedes-Benz, so long as this occurs before 6,500 miles (vehicle odometer).

For your convenience, this Maintenance Booklet contains a tire rotation confirmation page on which you can record the date and mileage when tire rotations were performed.

Severe operating conditions - The maintenance intervals have been determined so that the vehicle, under normal operating conditions, should operate properly between maintenance services. Severe operating conditions may call for correspondingly sooner replacement of the following items:

INTERIOR FILTERS (e.g. dust filter, recirculating air filter, activated charcoal filter or combination filter) are replaced as called for by the Maintenance System. Under severe dust conditions, or with the Climate Control frequently operating in the air recirculation mode, the filters should be replaced correspondingly sooner and changed more frequently than as called for by the Maintenance System.

Introduction

SPARK PLUGS. The Maintenance System calls for spark plug replacement every 91,000 miles or 5 years, whichever comes first. Severe operating conditions (frequent starting and stopping, excessive idling, sustained fast highway driving) may call for spark plugs to be replaced correspondingly sooner.

COOLANT should be checked for the proper concentration before the start of the winter season (or once a year in hot regions). Have the coolant (water/anticorrosion/antifreeze mixture) replaced every 143,000 miles or 15 years, see page 53. Replacement of coolant may be required more frequently if coolant is not maintained according to instructions and/or other than approved anticorrosion/antifreeze products for your vehicle are being used. For instructions on coolant, see "Coolants" in your vehicle Operator's Manual. For a listing of approved anticorrosion/antifreeze products for your vehicle, refer to the Factory Approved Service Products pamphlet, or contact an authorized Mercedes-Benz Center.

Wear items - While the Maintenance System calls for inspection of certain wear items, the system does not make any judgment on the condition of these wear items. Only a qualified technician can determine if a wear item needs to be replaced.

Engine oils and oil filters are

specifically tested for their suitability in our engines and durability for our service intervals. Therefore, only use approved engine oils and oil filters required for vehicles with Maintenance System. For a listing of approved engine oils and oil filters, refer to the Factory Approved Service products pamphlet, or contact an authorized Mercedes-Benz Center.

Using engine oils and oil filters of specification other than those expressly required for the Maintenance System or changing of oil and oil filter at change intervals longer than those called for by the Maintenance System will result in engine damage not covered by the Mercedes-Benz Limited Warranty.

Introduction

Regular checks

In addition to the services, we recommend that you check the following items regularly (for example: weekly, when refueling, or before any long journey):

- Engine oil level Check the engine oil level using the multifunction steering wheel/multifunction display oil level check. Further information about engine oil level measurement can be found in the vehicle Operator's Manual.
- Coolant level Please refer to the Operator's Manual for the correct procedure to check the coolant level.
- Brake fluid level If brake fluid has to be added, see an authorized Mercedes-Benz Center to determine the cause, e.g. leaks or worn brake pads.

 Windshield washing system - If the washer fluid level drops below 1/3, the windshield washer fluid level warning lamp will illuminate. Add washer fluid mixed with Mercedes-Benz windshield washer solvent/concentrate, test function and check wiper blades.

Check lights

Tire condition and pressures –
 Check at least every other week.
 Please refer to section "Tires and
 wheels" in the Operator's Manual for
 guidelines and correct procedures to
 check tire condition and pressures.

Please refer to the Factory Approved Service Products booklet or see your Mercedes-Benz Center for more information on selecting the proper fluids, lubricants, filters and oils for your vehicle.

Introduction

Notes on the warranty

An extensive and well-equipped network of Mercedes-Benz Centers is at your disposal for service work. Your authorized Mercedes-Benz Center can ensure that your vehicle is professionally and thoroughly serviced and repaired.

Please see the Service and Warranty Information booklet for detailed information on warranty terms and coverage.

Please follow the instructions given in this Maintenance Booklet, even if you entrust the vehicle to a third party for use or care. Only in this way will you be able to ensure that your warranty rights are not affected.

Service, replacement, or repair of the emission control devices and systems can be performed by any automotive repair establishment or individual using certified parts.

We strongly recommend that you have your vehicle serviced by your authorized Mercedes-Benz Center which is fully equipped to provide this service.

Please note that engines have to be serviced in accordance with special instructions and using special measuring equipment to comply with legal requirements concerning exhaust emissions. Modifications to or tampering with emissions components is not permissible. Your authorized Mercedes-Benz Center is familiar with the relevant regulations.

Introduction

Parts / Operating materials

We recommend only the use of Genuine Mercedes-Benz parts for service and repairs, since they meet our specifications. It is also important to only use fuels, lubricants, filters and anticorrosion/antifreeze coolant meeting factory specifications. Please refer to the Factory Approved Service Products booklet or see your Mercedes-Benz Center for more information on this subject.

Service records

Your authorized Mercedes-Benz Center will certify in the Maintenance Booklet the maintenance services on your vehicle which it has performed.

Other than the maintenance services described, the Maintenance Booklet does not record or reflect any repair work that may have been performed to your vehicle. Please keep those receipts with your vehicle records.

For information concerning warranty, see your Service and Warranty Information booklet.

Your authorized Mercedes-Benz Center will gladly furnish additional information on the maintenance of your vehicle.

We extend our best wishes for many miles of safe, pleasurable driving.

Mercedes-Benz USA, LLC A DaimlerChrysler Company

Emission System Maintenance

Gasoline Engines

The U.S. Environmental Protection Agency and, in California, the Air Resources Board have certified that the emission control systems of your vehicle comply with the applicable exhaust emission standards for MY 2005 vehicles. This vehicle also complies with the applicable Canadian Motor Vehicle Emission Standards.

To be certain that the emission control systems function as designed, regular maintenance is necessary for components of the vehicle which affect exhaust and evaporation emissions composition.

The vehicle owner is responsible for the regular maintenance of the emission control system, as well as the use of premium unleaded gasoline with an anti-knock index of at least 91 (displayed on the pump) in all gasoline engine models unless otherwise specified.

Failure to properly maintain the emission system may result in repairs not being covered by the emission system warranties.

Explanations of each maintenance job are given in numerical order on page 62.

Emission System Maintenance

Emission Control System Caution - Gasoline Engines

Your Mercedes-Benz vehicle is equipped with both a three-way catalyst and a closed loop oxygen sensor system to comply with current exhaust emission regulations. Keep your vehicle in proper operating condition by following our recommended maintenance instructions as outlined.

The following has to be adhered to:

a) In all gasoline engine models, use only premium unleaded gasoline with an anti-knock index of at least 91 (as displayed on the pump) unless otherwise specified. Damage to the engine could occur if premium unleaded fuel is not used. Refer to the Operator's Manual for special precautions.

- b) Leaded gasoline should not be used under any circumstances. Damage to the emission control components will result.
- c) The specified engine maintenance jobs have to be performed completely and at the required intervals. Correct ignition timing and properly functioning spark plugs for instance are important for the service life of the catalysts. Failure to properly perform the specified maintenance jobs may adversely affect the emission control system on the vehicle and reduce its service life.

Emission System Maintenance

- e) The operation of the emission control system must not be altered in any way. Alterations are not permissible by law. In addition, alterations may result in damage to the catalysts, increased fuel consumption, and impaired engine running conditions.
- f) Irregular engine running conditions should be corrected immediately by an authorized Mercedes-Benz Center. Such irregular running conditions can influence the proper function of the emission control system.

If the "CHECK ENGINE" indicator lamp in the instrument cluster illuminates when the engine is running, it indicates a possible malfunction of the engine management system or emission control system.

We recommend that you have the malfunction checked as soon as possible.

Emission System Maintenance

Emission Control System Caution - Diesel Engines

Your Mercedes-Benz is equipped with emission control devices to comply with current diesel exhaust emission regulations where the vehicle is certified for sale. Keep your vehicle in proper operating condition by following our recommended maintenance instructions as outlined.

The following has to be adhered to:

 a) The specified engine maintenance jobs have to be performed completely and at the required intervals. b) The operation of the emission control system must not be altered in any way. Alterations are not permissible by law. In addition, alterations may result in damage to the catalysts, increased fuel consumption, and impaired engine running conditions.

If the "CHECK ENGINE" indicator lamp in the instrument cluster illuminates when the engine is running, it indicates a possible malfunction of the engine management system or emission control system.

We recommend that you have the malfunction checked as soon as possible.

First visit: 1,000 - 3,000 miles

Date:		
Odometer:		
		Rubber stamp
Performed	Yes/No	
Diagnostic test		
Q+A on vehicle		Signature

First visit provided at no charge*

*This first visit for a basic vehicle diagnostic test at an authorized Mercedes-Benz Center is provided at no charge. Please refer to the Service and Warranty Information Booklet for full details.

First visit: 1,000 miles -3,000 miles

Appointment Month/year

Confirmations

Tire rotation

If applicable to your vehicle's tire configuration (see page 5), tire rotation should be performed in accordance with the tire manufacturer's recommended intervals, or sooner at first signs of irregular (uneven) tread wear. Tire manufacturer's rotation recommendations will necessitate a tire rotation at least once in between maintenance and at every maintenance service based on Mercedes-Benz maintenance intervals.

Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:

Tire rotations should be performed in accordance with the tire manufacturer's recommendations in the Tire Warranty Pamphlet included in your vehicle literature portfolio. However, tires should be rotated at the first sign of irregular tread wear, even if it occurs before the recommended rotation intervals, and should be checked regularly for wear and proper inflation. Please note that the useful life of tires will vary depending on tire type, speed rating, road surfaces, and individual driving style.

The first tire rotation occurring at an authorized Mercedes-Benz Center at any time up to 6,500 miles (vehicle odometer) is provided at no charge.

First tire rotation provided at no charge*

*This first tire rotation at an authorized Mercedes-Benz Center at any time up to 6,500 miles (vehicle odometer) is provided at no charge. Please refer to the Service and Warranty Information Booklet for full details.

Reminder: Tire rotation

Confirmations

Tire rotation

Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:
Date:	Odometer:	Date:	Odometer:

Maintenance: 13,000 miles Services 12 and 13

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Firs
Repair order no. (if applicable)		Mai
		due 13,0
	Signature	•
		or

First
Maintenance
due
13,000 miles
or

Maintenance: 26,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:	-	
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance due
	Signature	26,000 miles
		or

Maintenance: 39,000 miles Services 12, 13 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Nex
Repair order no. (if applicable)		Mai due
	Signature	39 ,
		or

xt intenance 000 miles

Maintenance: 52,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance
		due
	Signature	— 52,000 miles
		or
		Month/year

Maintenance: 65,000 miles Services 12, 13 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance due
	Signature	— 65,000 miles
		or
		Month/year

Maintenance: 78,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:
Odometer:	
Oil Brand / viscosity:	Rubber stamp
Repair order no. (if applicable)	
	Signature

Next Maintenance due 78,000 miles or

Maintenance: 91,000 miles Services 12, 13 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:
Odometer:	
Oil Brand / viscosity:	Rubber stamp
Repair order no. (if applicable)	j
	Signature

Next Maintenance due 91,000 miles or

Maintenance: 104,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance
		due
	Signature	— 104,000 miles
		or

Maintenance: 117,000 miles Services 12, 13 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:	_	
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance
		due
	Signature	— 117,000 miles
		or
		Month/year

Maintenance: 130,000 miles Services 12, 14 and other applicable services

Date.

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Waintenance service completed.	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance
		due
	Signature	— 130,000 miles
		or

Maintenance service completed:

Maintenance: 143,000 miles

Services 12 and 13, other applicable services and recommended high-mileage checks

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:
Odometer:	
Oil Brand / viscosity:	Rubber stamp
Repair order no. (if applicable)	
	Signature

Next Maintenance due 143,000 miles or

Maintenance: 156,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	_ Maintenance service completed:	
Odometer:	-	
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Mainter
		due
	Signature	 156,000
		or

nance) miles

Maintenance: 169,000 miles Services 12 and 13

Data

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date.	Maintenance service completed.	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	N
Repair order no. (if applicable)		Ŋ
		d 1
	Signature	ı
		Q

Maintananaa aaniiga aamalatad

lext **Maintenance** lue 69,000 miles r

Maintenance: 182,000 miles Services 12, 14 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:		
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)	_	Maintenance due
	Signature	— 182,000 miles
		or
		Month/year

Maintenance: 195,000 miles Services 12, 13 and other applicable services

For scope of work, refer to maintenance overview and description of maintenance services starting on page 49.

Date:	Maintenance service completed:	
Odometer:	_	
Oil Brand / viscosity:	Rubber stamp	Next
Repair order no. (if applicable)		Maintenance due
	Signature	— 195,000 miles
		or

Required Vehicle Maintenance Service Work (including Emission System Maintenance)

Notes:

For an overview of maintenance services and intervals, see page 50.

Maintenance services must be performed at number of miles or years (whichever comes first) as indicated, except where no time interval available or otherwise noted.

If your vehicle exceeds the mileage shown in the maintenance service overview, continue to maintain the vehicle by having performed the maintenance services at the time or mileage intervals (whichever comes first) as indicated starting on page 52.

Detailed descriptions for each maintenance service can be found starting on page 52.

For description of emission system maintenance jobs, see page 62.

The four digit-numbers listed next to the maintenance services are reference numbers of the detailed maintenance job descriptions listed in the Mercedes-Benz maintenance information used by Mercedes-Benz technicians.

Maintenance Booklet

Maintenance service overview E-Class (211)*

Miles	1,000 - 3,000	13,000	26,000	39,000	52,000	65,000	78,000	91,000
Time (Years)		1	2	3	4	5	6	7
First visit (⊳ page 52)	•							
Tire rotation (▷ page 52)	If applicable to your veh ommended intervals, or tire rotation at least one	sooner at first s	igns of irregular (ı	uneven) treadwea	r. Tire manufactu	rer's rotation rec	ommendations w	ill necessitate a
Service 1 (▷ page 52)	due when displayed	in maintenance	e service indica	tor				
Service 2 (▷ page 52)					•			
Service 3 (⊳ page 52)			•		•		•	
Service 4 (▷ page 53)			•		•		•	
Service 5 Gasoline engines (▷ page 53)						•		
Service 5 Diesel engine (▷ page 53)			•		•		•	
Service 6 (⊳ page 53)					• 2			
Service 7 (⊳ page 53)								• 3
Service 8 (▷ page 53)								
Service 9 (⊳ page 54)			• 1		• 1		• 1	
Service 10 (▷ page 54)						• 1		
Service 11 (▷ page 54)				• 1			• 1	
Service 12 (⊳ page 54)		•	•	•	•	•	•	•
Service 13 (⊳ page 55)		•		•		•		•
Service 14 (▷ page 56)			•		•		•	

High-mileage checks (▷ page 59)

^{*} except AMG models; refer to separate Maintenance Booklet for AMG vehicles

¹ not mileage dependent; only time interval applies ² at 52,000 miles or 5 years ³ at 91,000 miles or 5 years

Maintenance service overview E-Class (211)*

Miles	104,000	117,000	130,000	143,000	156,000	169,000	182,000	195,000
Time (Years)	8	9	10	11	12	13	14	15
First visit								
Tire rotation	ommended inte	rvals, or sooner at	first signs of irreg	page 5), tire rotation gular (uneven) tread ervices and at even	dwear. Tire manufa	acturer's rotation	recommendations	will necessitate
Service 1	due when dis	olayed in mainte	nance service i	ndicator				
Service 2	•				•			
Service 3	•		•		•		•	
Service 4	•		•		•		•	
Service 5 Gasoline engines			•					•
Service 5 Diesel engine	•		•		•		•	
Service 6	• 4				• 5			
Service 7							• 7	
Service 8				• 6				
Service 9	• 1		• 1		• 1		• 1	
Service 10			• 1					• 1
Service 11		• 1			• 1			• 1
Service 12	•	•	•	•	•	•	•	•
Service 13		•		•		•		•
Service 14	•		•		•		•	
High-mileage checks				• 8				

High-mileage checks

First visit at 1,000 - 3,000 miles

Diagnostic test and Q+A on vehicle

00-5500

This first visit for a basic vehicle diagnostic test at your authorized Mercedes-Benz Center is provided at no charge.

Tire rotations

If applicable to your vehicle's tire configuration (> page 5), tire rotation should be performed in accordance with the tire manufacturer's recommended intervals, or sooner at first signs of irregular (uneven) tread wear. Tire manufacturer's rotation recommendations will necessitate a tire rotation at least once in between maintenance services and at every maintenance service based on Mercedes-Benz maintenance intervals.

The first tire rotation (▷ page 17) occurring at an authorized Mercedes-Benz Center at any time up to 6,500 miles (vehicle odometer) is provided at no charge.

US Service 1 due when displayed in multifunction display

Wheels, brakes

Check brake pads for lining thickness front/rear Check condition of brake disks front/rear

4251

US Service 2 at every 52,000 miles or 4 years

Engine compartment

Replace engine air-cleaner insert

--

US Service 3 at every 26,000 miles or 2 years

Engine compartment

Replace combination filter

8384

US Service 4 at every 26,000 miles or 2 years	
Engine compartment Replace dust filter	8381
US Service 5 Gasoline engines (112, 113): at every 65,000 miles or 5 years	
Engine compartment Replace fuel filter	0780
US Service 5 Diesel engine (648): at every 26,000 miles or 2 years	
Engine compartment Replace fuel filter	0780
US Service 6 at every 52,000 miles or 5 years	
Passenger compartment Replace activated charcoal filter	8382
US Service 7 at every 91,000 miles or 5 years	
Engine compartment Replace spark plugs (Engines 112, 113)	1580
US Service 8 at every 143,000 miles or 15 years	
Engine compartment Replace coolant	2080

US Service 9 at every 2 years	
Check bodywork for paint work damage	9850
Underside of vehicle Chassis and load-bearing body components: Check for damage and corrosion	0090
Engine compartment Replace brake fluid, Check preload pressure of pressure reservoir	4281
US Service 10 at every 5 years	
Passenger compartment Tilt/sliding roof: Clean slide rails and slide shoes	7731
US Service 11 at every 3 years	
Passenger compartment Panorama sliding roof: Clean and lubricate guide mechanism	7732
US Service 12 at every 13,000 miles or 1 year	
Engine compartment Engine - oil and filter change	0101

US Service 13 - first at 13,000 miles or 1 year; after first every 26,000 miles or 2 years	
Engine compartment	
Check the following fluid levels, correct if necessary. If there is a loss of fluid, determine cause and perform repair with separate work order	
Brake system	4210
Power steering	4611
Windshield washer system, incl. rear window washer (where applicable)	8210
Engine cooling system, antifreeze and corrosion protection	2010
Check catch and safety catch and hinges on engine hood for proper operation	8851
Check battery condition using "Midtronics MCR 717" tester	
Interior	
Function check	
Warning/indicator lamps, illumination and interior lighting	
Windshield wipers, windshield washer system, headlamp cleaning system, where applicable: rear window wiper, rear window washer system	8252
Reset maintenance service indicator in instrument cluster	

US Service 13 (continued)	
Wheels, brakes	
Inspect tires for damage and splits, measure tread depth and record in mm	4051
Check thickness of front brake pads (remove 1 front wheel at Service 13)	4251
Correct tire inflation pressure, incl. spare tire	
Trunk	
Check main battery condition using "Midtronics MCR 717" tester	
US Service 14 - first at 26,000 miles or 2 years; after first every 26,000 miles or 2 years	
Engine compartment	
Leakage - Major components Check for chafe marks, line routing, damaged components In the event of leakage, determine cause and perform repair via separate work order	0053

US Service 14 (continued)	
Check the following fluid levels, correct if necessary. If there is a loss of fluid, determine cause and perform repair with separate work order	
Brake system	4210
Power steering	4611
Windshield washer system, incl. rear window washer (where applicable)	8210
Engine cooling system, antifreeze and corrosion protection	2010
Check condition of poly-V-belt	1351
Check catch and safety catch and hinges on engine hood for proper operation	8851
Check auxiliary battery condition using "Midtronics MCR 717" tester	
Interior	
Function check	
Check parking brake (function test only)	4290
Warning and indicator lamps, illumination and interior lighting	
Windshield wipers, windshield washer system, headlamp cleaning system, where applicable: rear window wiper, rear window washer system	8252
Check seat belts and buckles for signs of external damage and proper function	9150
Reset maintenance service indicator in instrument cluster	

Maintenance Booklet

US Service 14 (continued)	
Wheels, brakes	
Inspect tires for damage and splits, measure tread depth and record in mm	4051
Check condition of front/rear brake pads for lining thickness	4251
Correct tire inflation pressure, incl. spare tire	
Underside of vehicle	
Leakage - Major components Check for chafe marks, line routing, damaged components In the event of leakage, determine cause and perform repair via separate work order	0053
Check front axle ball joints for play, check rubber boots	3353
Inspect condition of flexible disks	4152
Inspect play of tie rod and drag link joints, inspect rubber boots	4653
Trunk	
Check main battery condition using "Midtronics MCR 717" tester	

Recommended additional maintenance checks for high-mileage vehicles at 143,000 miles	
Check if all fluid levels and changes are updated	
Transmission	
Rear axle	
Front axle (if applicable)	
Transfer case (if applicable)	
Check if air, fuel, ventilation filters are updated	
Engine air filter	
Fuel filter	
Combination/dust filter	
Activated charcoal filter	

Recommended additional maintenance checks for high-mileage vehicles at 143,000 miles (continued)	
Check integrity of engine, mechanical components	
Perform compression test (hot and cold)	
Perform leak down test (hot and cold)	
Check spark plugs	
Exhaust system hangers and leaks	
Check for damaged/worn drivetrain parts	
Front wheel bearing play	
Rear wheel bearing play	
Axle joint play	
Flexible discs	
Tie rod and drag link joints	

Recommended additional maintenance checks for high-mileage vehicles at 143,000 miles (continued)	
Check for updates performed	
Recalls and Service Campaigns	

Description of Emission System Maintenance Jobs

The composition of exhaust emissions is influenced not only by the special emission control equipment, but also by various engine components and their adjustments.

Therefore, emission system maintenance must include these engine components. Some maintenance jobs are actually only tests. They are important however, because they allow early detection of discrepancies which can later lead to increased exhaust emissions. It is generally less expensive to have such items adjusted immediately rather than allowing them to contribute to costly repairs. The maintenance intervals have been determined so that the vehicle, under normal conditions, should operate properly between services.

0101 Engine oil and filter change

Change the engine oil and oil filter every 13,000 miles. If oil consumption should increase, determine the cause and take necessary corrective steps. Do not reset the Maintenance System service indicator if the oil is topped up or changed outside the interval of 13,000 miles.

0980 Replace air filter element

Under normal dust conditions, replace air filter element approximately every 52,000 miles or 4 years. Clean air filter cover and housing prior to removal of air filter element.

0780 Replace fuel filter

Replace the fuel filter approximately every 65,000 miles or 5 years (gasoline engines) or 26,000 miles or 2 years (diesel engine).

1351 Check engine poly-V-belt condition

The poly-V-belt is subject to wear and aging. It must be checked for cracks and wear at every service 14. Replace poly-V-belt if necessary.

1580 Replace spark plugs

Spark plugs are subject to electrode erosion and must be replaced every 91,000 miles or 5 years, or more frequently as may be required when subject to severe operating conditions.

Maintenance Booklet

Maintenance Booklet

Printed in U.S.A.

All rights reserved. Reproduction or translation in whole or in part is not permitted without authorization from the publisher.

Editorial status: 08/2004

Model:

211 (except AMG models)

Distributor in the United States:

Mercedes-Benz USA, LLC One Mercedes Drive, P.O. Box 350

Montvale, NJ 07645-0350

Order No. P-6515-8113-13B (08/2004) Edition B Part No. 211 584 70 93

• 2004 Mercedes-Benz USA, LLC

A DaimlerChrysler Company

www.MBUSA.com

Printed in U.S.A.