



Mercedes-Benz

# Maintenance

## Booklet

We want you to enjoy your Mercedes-Benz automobile. Vehicle safety and operational reliability are two very important factors and to maintain them, regular maintenance services are necessary.

We continuously strive to improve our product and ask for your understanding that we reserve the right to make changes in the periodic maintenance work for our vehicles. The information in this manual is accurate as of the press date. At the time of your scheduled maintenance appointments with your authorized Mercedes-Benz Center, the most current maintenance work information will be utilized for your vehicle's age or mileage. Please check with your authorized Mercedes-Benz Center for any changes to the periodic maintenance work required for your vehicle.

#### PLEASE NOTE

WE STRONGLY RECOMMEND THAT YOU HAVE YOUR VEHICLE SERVICED BY YOUR AUTHORIZED MERCEDES-BENZ CENTER WHO IS FULLY EQUIPPED TO PROVIDE THIS SERVICE AND THAT GENUINE MERCEDES-BENZ PARTS BE USED.

SERVICE, REPLACEMENT, OR REPAIR OF THE EMISSION CONTROL DEVICES AND SYSTEMS CAN BE PERFORMED BY ANY AUTOMOTIVE REPAIR ESTABLISHMENT OR INDIVIDUAL USING CERTIFIED PARTS.

THE USE OF DEFECTIVE OR NON-EQUIVALENT PARTS MAY RESULT IN YOUR EMISSION PERFORMANCE WARRANTY CLAIM BEING DENIED.

#### Symbols

Trademarks®:

- AdBlue® is a registered trademark of the German Association of the Automotive Industry (VDA).

The following symbols are found in this Operator's Manual:

#### Warning!

Warning notices draw your attention to hazards that may endanger your health or life, or the health or life of others.

 Highlights hazards that may result in damage to your vehicle.

 Helpful hints or further information you may find useful.

 page This symbol tells you where to look for further information on a topic.

 This continuation symbol marks a warning or procedure which is continued on the next page.

---

<b>General Information . . . . .</b>	<b>2</b>
Vehicle data . . . . .	2
Protecting the environment . . . . .	3

---

<b>Maintenance Booklet . . . . .</b>	<b>5</b>
Introduction . . . . .	6
Emission System Maintenance . . . . .	10
Description of Emission System	
Maintenance Jobs . . . . .	12
Maintenance service descriptions . . . . .	13
Service at 2,000 miles . . . . .	13
Tire rotation at 5,000 miles . . . . .	13
Service at 10,000 miles or 1 year . . . . .	14
Service at 20,000 miles or 2 years . . . . .	18
Service at 30,000 miles or 3 years . . . . .	23
Service at 40,000 miles or 4 years . . . . .	27
Service at 50,000 miles or 5 years . . . . .	32
Service at 60,000 miles or 6 years . . . . .	36
Service at 70,000 miles or 7 years . . . . .	41
Service at 80,000 miles or 8 years . . . . .	45
Service at 90,000 miles or 9 years . . . . .	50
Service at 100,000 miles or 10 years . . . . .	54
Service at 110,000 miles or 11 years . . . . .	59
Service at 120,000 miles or 12 years . . . . .	63
Service at 130,000 miles or 13 years . . . . .	68
Service at 140,000 miles or 14 years . . . . .	72
Service at 150,000 miles or 15 years . . . . .	78
Vehicle Maintenance High-mileage	
Service Work . . . . .	82
High-mileage additional work . . . . .	90
Confirmations . . . . .	92



## Vehicle data

## General Information

▶	▶
Model	Vehicle Identification Number (VIN)
▶	▶
Date of initial registration	Paint color and code
▶	▶
License Plate No.	License Plate No.
▶	▶
License Plate No.	License Plate No.
▶	▶
License Plate No.	License Plate No.
▶	▶
License Plate No.	License Plate No.

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Protecting the environment

Natural resources form the basis of our existence on this planet. The objectives of our policy are for these resources to be used sparingly and in a manner which takes the requirements of both nature and humanity into account.

Our declared policy is integrated environmental protection. This policy starts at the root causes and encompasses in its management decisions all the consequences for the environment which could arise from production processes or the products themselves.

You too can help to protect the environment by operating your Mercedes-Benz in an environmentally responsible manner.

Operating conditions and your individual driving style to a large extent influence fuel consumption and the rate of engine, brake, and tire wear. To reduce fuel consumption and the rate of wear, please consider the following:

- Avoid short trips.
- Make sure that the tire pressures are always correct.
- Avoid frequent, abrupt acceleration.
- Do not carry any unnecessary weight.
- Remove ski holders and roof racks once you no longer need them.
- Do not warm up the engine with the vehicle stationary.
- Shift gears such that each gear is used only up to  $\frac{2}{3}$  of its maximum engine speed.
- Keep an eye on the vehicle's fuel consumption.

A regularly serviced vehicle will also help protect the environment. You should adhere to the maintenance intervals displayed by the Maintenance System service indicator, along

with other maintenance work described in this booklet.

We recommend that you have maintenance services performed by your authorized Mercedes-Benz Center using Genuine Mercedes-Benz parts.



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.



Introduction .....	6
Emission System Maintenance .....	10
Description of Emission System Maintenance Jobs .....	12
Maintenance service descriptions ....	13
Service at 2,000 miles .....	13
Tire rotation at 5,000 miles .....	13
Service at 10,000 miles or 1 year .....	14
Service at 20,000 miles or 2 years ...	18
Service at 30,000 miles or 3 years ...	23
Service at 40,000 miles or 4 years ...	27
Service at 50,000 miles or 5 years ...	32
Service at 60,000 miles or 6 years ...	36
Service at 70,000 miles or 7 years ...	41
Service at 80,000 miles or 8 years ...	45
Service at 90,000 miles or 9 years ...	50
Service at 100,000 miles or 10 years .....	54
Service at 110,000 miles or 11 years .....	59
Service at 120,000 miles or 12 years .....	63
Service at 130,000 miles or 13 years .....	68
Service at 140,000 miles or 14 years .....	72
Service at 150,000 miles or 15 years .....	78
Vehicle Maintenance High-mileage Service Work .....	82
High-mileage additional work .....	90
Confirmations .....	92

## Introduction

### Mercedes-Benz Maintenance System

Your Mercedes-Benz comes equipped with the **Mercedes-Benz Maintenance System**. The Maintenance system tracks distance driven and the time elapsed since your last service. The maintenance service is indicated in the multifunction display in the instrument cluster.

Approximately 1 month before a maintenance service is due, a message appears in the multifunction display. The message provides the remaining miles or days until the next maintenance service is due.

A descriptive listing of the service items are contained in this booklet starting on (> page 13). Following each maintenance service, your authorized Mercedes-Benz Center will reset the Maintenance System service indicator by confirming the service items performed.

The authorized Mercedes-Benz Center performing the maintenance services will confirm the work has been carried out using the Confirmation pages in this booklet (> page 92).

We continuously strive to improve our product and ask for your understanding that we reserve the right to make changes in the periodic maintenance work for our vehicles. The information in this manual is accurate as of the press date. At the time of your scheduled maintenance appointments with your authorized Mercedes-Benz Center, the most current maintenance work information will be utilized for your vehicle's age or mileage. Please check with your authorized Mercedes-Benz Center for any changes to the periodic maintenance work for your vehicle.

- i** If the Maintenance System service counter was inadvertently reset, have an authorized Mercedes-Benz Center correct it. Please only reset if the proper

maintenance service has been performed. Resetting the system without performing the proper maintenance service will result in engine and/or other vehicle damage not covered by the Mercedes-Benz New Vehicle Limited Warranty.

### Required and Recommended Service Work

Required and Recommended Service Work includes inspection or maintenance of many different components and systems in your vehicle. The replacement of certain components at varying intervals is also part of Required and Recommended Service Work.

Required Service Work is intended to help maximize the service life of components or systems important to your vehicle's continued proper operation.

In addition to the Required Service Work, Recommended Service Work is intended to provide you with the flexibility to choose which maintenance work is performed on your vehicle based on its needs or recommendations from your authorized Mercedes-Benz Center.

- i** Please note any maintenance work not performed or not performed at the specified interval which results in the failure of the warranted component(s) or system(s) in question may not be covered by the Mercedes-Benz New Vehicle Limited Warranty.

### Tire rotation

Your vehicle's tires are a critical component to overall vehicle performance and vehicle stability. The useful life of tires will vary and is proportional to tire type, speed rating, ambient conditions, tire loading, tire inflation pressure, road surfaces, and individual



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

driving style, among other factors. Therefore, Mercedes-Benz recommends regular checks for wear and proper inflation and, if applicable to your vehicle's tire configuration, tire rotation.

Tire rotations can be performed on vehicles with the same front and rear tire dimensions. If your vehicle is equipped with the same tire dimensions, tires can be rotated by observing a front-to-rear rotation pattern that will maintain the intended rotation (spinning) direction of the tire (on unidirectional tires, an arrow on the sidewall indicates the intended rotation or spinning direction of the tire). In some cases, such as when your vehicle is configured with staggered sizes (different tire sizes, front vs. rear), tire rotations are not possible.

If your vehicle's tire configuration allows for tire rotation, tire rotation should be performed in accordance with the recommended intervals, or sooner at first signs of irregular (uneven) tread wear. Tire rotation recommendations will likely necessitate a tire rotation at least once in between maintenance services and at every maintenance service based on Mercedes-Benz maintenance intervals.

The first tire rotation, so long as it occurs at or before 5,000 miles (vehicle odometer), will be provided at no charge by your authorized Mercedes-Benz Center courtesy of Mercedes-Benz. Please refer to the Service and Warranty Information booklet for full details.

Should a tire rotation not be possible for your vehicle's tire configuration, your authorized Mercedes-Benz Center will check your tires for proper tire inflation pressure and perform a tread inspection, also at no charge courtesy of Mercedes-Benz, so long as this occurs at or before 5,000 miles (vehicle odometer).

For your convenience, this Maintenance Booklet contains a tire rotation confirmation page on which you can record the date and

mileage when tire rotations were performed (▷ page 92).

### Severe operating conditions

The maintenance intervals have been determined so that the vehicle, under normal operating conditions, should operate properly between maintenance services. Severe operating conditions may call for correspondingly sooner replacement of the following items:

#### • INTERIOR FILTERS

(e.g. dust filter, recirculating air filter, activated charcoal filter or combination filter) are replaced as called for by the Maintenance System. Under severe dust conditions, or with the Climate Control frequently operating in the air recirculation mode, the filters should be replaced correspondingly sooner and changed more frequently than as called for by the Maintenance System.

#### • SPARK PLUGS

Spark plugs should be replaced according to the specified maintenance interval. Severe operating conditions (frequent starting and stopping, excessive idling, sustained fast highway driving) may call for spark plugs to be replaced correspondingly sooner.

#### • COOLANT

Have the coolant (water/anticorrosion/antifreeze mixture) replaced at the specified maintenance interval. In vehicles with engine 275 and G-Class with engine 113, the coolant should be checked for proper concentration before the start of each winter season (or once a year in hot regions).

Replacement of coolant may be required more frequently if coolant is not maintained according to instructions and/or other than approved anticorrosion/antifreeze



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work. ▷▷

products for your vehicle are being used. For instructions on coolant, see “Coolants” in your vehicle Operator’s Manual. For a listing of approved anticorrosion/antifreeze products for your vehicle, refer to [www.startekinfo.com](http://www.startekinfo.com) or [www.mbusa.com/ownersonline](http://www.mbusa.com/ownersonline), or contact your authorized Mercedes-Benz Center.

### Wear items

While the Maintenance System calls for inspection of certain wear items, the system does not make any judgment on the condition of these wear items. Only a qualified technician can determine if a wear item needs to be replaced.

### Approved engine oils and oil filters

Engine oils and oil filters are specifically tested for their suitability in our engines and durability for our service intervals. Therefore, only use approved engine oils and oil filters required for vehicles with Maintenance System. Conventional petroleum-based oils must not be used for vehicles equipped with the Mercedes-Benz Maintenance System.

The following cases are not covered by the Mercedes-Benz New Vehicle Limited Warranty:

- Using engine oils and oil filters of specification other than those expressly required for the Maintenance System.
- Changing of oil and oil filter at change intervals longer than those called for by the Maintenance System.
- Using any oil additives.

Mercedes-Benz USA, LLC recommends MOBIL OIL.


Use the table below to determine the MB sheet number. Refer to the Operator’s Manual for the engine type of your model. The model and engine type can be found in the chapter “Technical data” under “Vehicle specification”.

Engine type	MB sheet number
113	229.5
156	229.5 <sup>1</sup>
272	229.5
273	229.5
275	229.5
642	229.5 1

**i** MB sheet numbers are printed on the outside of oil containers.

### Viscosity grades for engine oils

Using the chart below, select oil viscosity according to the lowest air temperature expected before the next oil change.

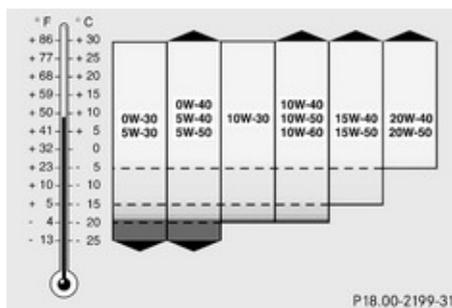

### Regular checks

In addition to the services, we recommend that you check the following items regularly (for example: weekly, when refueling, or before any long journey):

<sup>1</sup> Restriction: Only SAE 0W-40 or 5W-40 engine oils may be used.



### Warning!

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

- **Engine oil level** - Depending on how your vehicle is equipped, check the engine oil level using the oil level dipstick or the control system via the multifunction steering wheel/display. Further information about engine oil level measurement can be found in the vehicle Operator's Manual.
- **Coolant level** - Please refer to the Operator's Manual for the correct procedure to check the coolant level.
- **Brake fluid level** - If brake fluid has to be added, see an authorized Mercedes-Benz Center to determine the cause, e.g. leaks or worn brake pads.
- **Windshield washing system** - If the washer fluid level drops below 1/3, the windshield washer fluid level warning lamp will illuminate. Add washer fluid mixed with Mercedes-Benz windshield washer solvent/concentrate, test function and check wiper blades.
- **Lights**
- **Tire condition and pressures** - Check at least monthly. Please refer to section "Tires and wheels" in the Operator's Manual for guidelines and correct procedures to check tire condition and pressures.

For more information on selecting the proper fluids, lubricants, and oils for your vehicle, please refer to [www.startekinfo.com](http://www.startekinfo.com) or [www.mbusa.com/ownersonline](http://www.mbusa.com/ownersonline), or see your authorized Mercedes-Benz Center.

### Notes on the warranty

An extensive and well-equipped network of authorized Mercedes-Benz Centers is at your disposal for service work. Your authorized Mercedes-Benz Center can ensure that your vehicle is professionally and thoroughly serviced and repaired.

Please see the Service and Warranty Information booklet for detailed information on warranty terms and coverage.

**Please follow the instructions given in this Maintenance Booklet, even if you entrust the vehicle to a third party for use or care. Only in this way will you be able to ensure that your warranty rights are not affected.**

**Service, replacement, or repair of the emission control devices and systems can be performed by any automotive repair establishment or individual using certified parts.**

**We strongly recommend that you have your vehicle serviced by your authorized Mercedes-Benz Center which is fully equipped to provide this service.**

Please note that engines have to be serviced in accordance with special instructions and using special measuring equipment to comply with legal requirements concerning exhaust emissions. Modifications to or tampering with emissions components is not permissible. Your authorized Mercedes-Benz Center is familiar with the relevant regulations.

### Parts/Operating materials

We recommend only the use of Genuine Mercedes-Benz parts for service and repairs, since they meet our specifications. It is also important to only use fuels, lubricants and anticorrosion/antifreeze coolant meeting factory specifications. Please refer to [www.startekinfo.com](http://www.startekinfo.com) or [www.mbusa.com/ownersonline](http://www.mbusa.com/ownersonline), or see your authorized Mercedes-Benz Center for more information on this subject.

### Service records

Your authorized Mercedes-Benz Center will certify in this booklet the maintenance



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work. ▷▷

services on your vehicle which it has performed.

Other than the maintenance services described, the Maintenance Booklet does not record or reflect any repair work that may have been performed to your vehicle. Please keep those receipts with your vehicle records.

For information concerning warranty, see your Service and Warranty Information booklet.

Your authorized Mercedes-Benz Center will gladly furnish additional information on the maintenance of your vehicle.

Mercedes-Benz USA, LLC  
A Daimler Company

## Emission System Maintenance

### Gasoline Engines

The U.S. Environmental Protection Agency and, in California, the Air Resources Board have certified that the emission control systems of your vehicle comply with the applicable exhaust emission standards for MY 2009 vehicles.

To be certain that the emission control systems function as designed, regular maintenance is necessary for components of the vehicle which affect exhaust and evaporative emissions composition.

The vehicle owner is responsible for the regular maintenance of the emission control system, as well as the use of premium unleaded gasoline with an anti-knock index of at least 91 (displayed on the pump) in all gasoline engine models unless otherwise specified.

Failure to properly maintain the emission system may result in repairs not being covered by the emission system warranties.

Explanations of each maintenance job are given on (▷ page 12).

### Emission Control System Caution - Gasoline Engines

Your Mercedes-Benz vehicle is equipped with both a three-way catalyst and a closed loop oxygen sensor system to comply with current exhaust emission regulations. Keep your vehicle in proper operating condition by following our recommended maintenance instructions as outlined.

The following has to be adhered to:

- a) In all gasoline engine models, use only premium unleaded gasoline with an anti-knock index of at least 91 (as displayed on the pump) unless otherwise specified.** Damage to the engine could occur if premium unleaded fuel is not used. Refer to the Operator's Manual for special precautions.
- b) Leaded gasoline should not be used under any circumstances.** Damage to the emission control components will result.
- c) In select models, the use of Ethanol (E85) is also permissible.** Models capable of also operating with E85 are identified by a label on the fuel filler flap reading 'Premium gasoline or E85 only!'. Do not use Ethanol fuel (E85) to operate any vehicle unless it is specifically identified as Ethanol fuel (E85) compatible. Damage to the engine could occur if improper fuels are used. Refer to the Operator's Manual for special precaution.
- d) The specified engine maintenance jobs have to be performed completely and at the required intervals.** Correct ignition timing and properly functioning spark plugs for instance are important for the service life of the catalysts. Failure to properly perform the specified maintenance jobs may adversely affect the emission control system on the vehicle and reduce its service life.



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

**e) The operation of the emission control system must not be altered in any way.**

Alterations are not permissible by law. In addition, alterations may result in damage to the catalysts, increased fuel consumption, and impaired engine running conditions.

**f) Irregular engine running conditions should be corrected immediately by an authorized Mercedes-Benz Center.** Such irregular running conditions can influence the proper function of the emission control system.

If the “CHECK ENGINE” indicator lamp in the instrument cluster illuminates when the engine is running, it indicates a possible malfunction of the engine management system or emission control system.

We recommend that you have the malfunction checked as soon as possible.

### Emission Control System Caution - Diesel Engines

Your Mercedes-Benz is equipped with emission control devices to comply with current diesel exhaust emission regulations where the vehicle is certified for sale. Keep your vehicle in proper operating condition by following our recommended maintenance instructions as outlined.

The following must be adhered to:

**a)** Diesel engines require ULTRA-LOW SULFUR HIGHWAY DIESEL FUEL (15 ppm SULFUR MAXIMUM) that meets the ASTM D975 standard. Failure to use ULTRA-LOW SULFUR HIGHWAY DIESEL FUEL can severely damage the vehicle’s exhaust after-treatment device. Please refer to [www.startekinfo.com](http://www.startekinfo.com) or [www.mbusa.com/ownersonline](http://www.mbusa.com/ownersonline), or your authorized Mercedes-Benz Center for additional information about diesel fuel pump labeling.

**b)** Mercedes-Benz USA, LLC approves the use of B5 biodiesel (standard diesel with a maximum of up to 5 % biodiesel content) in

all Common Rail Injection Diesel “CDI-engines.” Diesel fuels containing a higher percentage of biodiesel content will cause damage to your engine and are not approved.

Biodiesel can be refined from a variety of raw materials which may result in widely varying properties. Only use approved biodiesel.

Approved biodiesel meets the ASTM D6751 standard and has the necessary oxidation stability (minimum 6 hours, proved with EN 14112 method) to prevent deposits and/or corrosion. The use of non-approved biodiesel may damage the fuel system.

Please ask your service station for further information. If the B5 biodiesel blend is not sufficiently labeled to clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz limited warranty does not cover damage caused by the use of fuels not meeting Mercedes-Benz approved fuel standards.

**c) The specified engine maintenance jobs have to be performed completely and at the required intervals.**

**d) The operation of the emission control system must not be altered in any way.** Alterations are not permissible by law. In addition, alterations may result in damage to the catalysts, increased fuel consumption, and impaired engine running conditions. If the “CHECK ENGINE” indicator lamp in the instrument cluster illuminates when the engine is running, it indicates a possible malfunction of the engine management system or emission control system.

We recommend that you have the malfunction checked as soon as possible.



**Warning!**

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

### BlueTEC exhaust gas aftertreatment with AdBlue®

Models:

- R 320 BlueTEC
- ML 320 BlueTEC
- GL 320 BlueTEC

The BlueTEC exhaust gas aftertreatment system requires a reducing agent (AdBlue®) in order to function properly. Maintaining the level and condition of the AdBlue® agent is part of the regular maintenance service work. Under normal driving conditions one tankful of AdBlue® agent should suffice until the next maintenance service.

AdBlue® is a non-flammable, non-toxic, colorless and odorless, water-soluble liquid.

**!** Only use AdBlue® complying with ISO 22241. Do not add special additives to AdBlue® and do not dilute AdBlue® with water. Otherwise, the BlueTEC exhaust gas aftertreatment system could be damaged.

### Description of Emission System Maintenance Jobs

The composition of exhaust emissions is influenced not only by the special emission control equipment, but also by various engine components and their adjustments.

Therefore, emission system maintenance must include these engine components. Some maintenance jobs are actually only tests. They are important however, because they allow early detection of discrepancies which can later lead to increased exhaust emissions. It is generally less expensive to have such items adjusted immediately rather than allowing them to contribute to costly repairs. The maintenance intervals have been determined so that the vehicle, under normal

conditions, should operate properly between services.

### Engine oil and filter change

Change the engine oil and oil filter every 10,000 miles or 1 year. If oil consumption should increase, determine the cause and take necessary corrective steps. Do not reset the Maintenance System service indicator if the oil level is adjusted or changed outside the interval of 10,000 miles or 1 year.

### Replace air filter

Under normal dust conditions, replace the air filter at every 40,000 miles or 4 years. In vehicles with engine 275 replace the air filter at every 60,000 miles or 6 years. Clean air filter cover and housing prior to removal of air filter.

### Replace fuel filter

Replace the fuel filter every 150,000 miles or 15 years. In diesel vehicles replace every 20,000 miles or 2 years and in SL-Class and G-Class vehicles every 60,000 miles or 6 years.

### Check engine poly-V-belt condition

The poly-V-belt is subject to wear and aging. It must be checked for cracks and wear at every 20,000 miles or 2 years. Replace poly-V-belt if necessary.

### Replace spark plugs

Spark plugs are subject to electrode erosion and must be replaced according to the specified maintenance intervals, or more



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

frequently as may be required when subject to severe operating conditions.

### Evacuate and fill up AdBlue®

Fill up AdBlue® every 10,000 miles or 1 year.

Evacuate and fill up AdBlue® every 20,000 miles or 2 years.

## Maintenance service descriptions

### Vehicle Maintenance Service Work (including Emission System Maintenance)

- i** Maintenance services should be performed at the number of miles or years (whichever comes first) as indicated.

## Service at 2,000 miles

### Required Service Work

	C-Class	CLS-Class	E-Class	SL-Class	G-Class
Replace rear axle differential fluid (only C 63 AMG, CLS 63 AMG, E 63 AMG, SL 63 AMG with AMG Performance Package, SL 65 AMG and SL 65 AMG Black Series)	•	•	•	•	
Oil change in front axle (G 55 K AMG)					•
Oil change in rear axle (G 55 K AMG)					•

## Tire rotation at 5,000 miles

A 5,000-mile recommended tire rotation interval will likely necessitate tire rotation at least once in between each 10,000-mile

If your vehicle exceeds the time or mileage of the maintenance service descriptions, continue to maintain the vehicle following the maintenance services specified in the High Mileage section (▷ page 82).

Detailed descriptions for each maintenance service can be found starting on (▷ page 13).

For description of emission system maintenance jobs, see (▷ page 12).

maintenance service and at every 10,000-mile maintenance service. Please refer to (▷ page 6) for additional tire rotation information and (▷ page 92) to record when your vehicle's tires have been rotated.



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work. ▷▷

**Recommended Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable) <sup>2</sup>	•	•	•	•	•	•	•	•	•	•	•	•

**Service at 10,000 miles or 1 year**

**Required Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Parking brake - Adjust cable slack			•							•		
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•

<sup>2</sup> Tire rotation can not be performed on vehicles equipped with staggered front/rear tire sizes.



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			



**Warning!**

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 20,000 miles or 2 years

## Required Service Work

	G-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b>	•	•	•	•	•	•	•	•	•	•	•	•
Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order												
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Recommended Service Work												
	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

## Service at 30,000 miles or 3 years

### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Replace coolant for main circuit (engine 275)		•							•	•		



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 40,000 miles or 4 years

## Required Service Work

	G-Class	GL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b>	•	•	•	•	•	•	•	•	•	•	•	•
Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order												
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
Automatic transmission - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Transfer case - oil change (4MATIC models)					•							
Replace rear axle differential fluid (only C 63 AMG, CLS 63 AMG, E 63 AMG, SL 63 AMG with AMG Performance Package, SL 65 AMG and SL 65 AMG Black Series)	•			•	•					•		
Replace air filter (except engine 275)	•	•	•	•	•	•	•	•	•	•	•	•



### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

**Recommended Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

## Service at 50,000 miles or 5 years

### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Oil change in front axle												•
Oil change in rear axle												•
Oil change in transfer case												•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

**Recommended Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
Replace activated charcoal filter (if applicable)			•									



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 60,000 miles or 6 years

## Required Service Work

	G-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter										•		•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b> Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
Replace coolant for main circuit (engine 275)		•							•	•		
Replace air filter (engine 275)		•							•	•		
Replace spark plugs (engine 275)		•							•	•		

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Recommended Service Work												
	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

## Service at 70,000 miles or 7 years

### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 80,000 miles or 8 years

## Required Service Work

	G-Class	GL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b>	•	•	•	•	•	•	•	•	•	•	•	•
Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order												
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
Automatic transmission - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Replace rear axle differential fluid (only C 63 AMG, CLS 63 AMG, E 63 AMG, SL 63 AMG with AMG Performance Package, SL 65 AMG and SL 65 AMG Black Series)	•			•	•					•		
Replace air filter (except engine 275)	•	•	•	•	•	•	•	•	•	•	•	•
Replace spark plugs (except engine 275, 642)	•	•	•	•	•	•	•	•	•	•	•	•



### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

## Service at 90,000 miles or 9 years

## Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Replace coolant for main circuit (engine 275)		•							•	•		

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 100,000 miles or 10 years

## Required Service Work

	G-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b>	•	•	•	•	•	•	•	•	•	•	•	•
Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order												
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
Oil change in front axle												•
Oil change in rear axle												•
Oil change in transfer case												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Recommended Service Work												
	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
Replace activated charcoal filter (if applicable)			•									
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

### Service at 110,000 miles or 11 years

#### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 120,000 miles or 12 years

## Required Service Work

	G-Class	GL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter										•		•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b> Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order	•	•	•	•	•	•	•	•	•	•	•	•



Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
Automatic transmission - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Replace coolant for main circuit (engine 275)		•							•	•		
Replace rear axle differential fluid (only C 63 AMG, CLS 63 AMG, E 63 AMG, SL 63 AMG with AMG Performance Package, SL 65 AMG and SL 65 AMG Black Series)	•			•	•					•		
Replace air filter	•	•	•	•	•	•	•	•	•	•	•	•
Replace spark plugs (engine 275)		•							•	•		



### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

## Service at 130,000 miles or 13 years

### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

**Recommended Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 140,000 miles or 14 years

## Required Service Work

	G-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b>	•	•	•	•	•	•	•	•	•	•	•	•
Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order												
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Recommended Service Work												
	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Service at 150,000 miles or 15 years

## Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (except engine 642)	•	•	•	•	•	•	•	•	•		•	
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Replace coolant	•	•	•	•	•	•	•	•	•	•	•	•
Replace coolant for low temperature circuit (engine 275)		•							•	•		
Oil change in front axle												•
Oil change in rear axle												•
Oil change in transfer case												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
Replace activated charcoal filter (if applicable)			•									



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using "Midtronics MCR 717" tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

## Vehicle Maintenance High-mileage Service Work

High-mileage Service at 160,000 miles or 16 years; then every 20,000 miles or 2 years

### Required Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Check condition of poly-V-belt	•	•	•	•	•	•	•	•	•	•	•	•
Replace fuel filter (engine 642)					•	•	•	•				
Clean water drain in air/water duct						•	•	•				
AdBlue® evacuate and fill up (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Replace brake fluid	•	•	•	•	•	•	•	•	•	•	•	•
Replace combination or dust filter	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	
Check thickness, condition of front and rear brake pads and discs												•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Leakage - Major components</b> Check for chafe marks, line routing, damaged components. In the event of leakage, determine cause and perform repair with separate work order	•	•	•	•	•	•	•	•	•	•	•	•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Check AdBlue® lines and components for leaks and damage (engine 642)						•	•	•				
Visually inspect condition of front axle ball joints, rubber boots	•	•	•	•	•	•	•	•	•	•	•	
Visually inspect condition of rear axle ball joints, rubber boots						•	•	•				
Visually inspect condition of driveshaft flexible discs	•	•	•	•	•				•	•	•	
Visually inspect condition of steering mechanical components, rubber boots	•	•	•	•	•	•	•	•	•	•	•	•
Visually inspect propeller shafts, universal joints and collapsible sections						•	•	•				•
Bolts attaching steering (check/tighten)												•
Joint housing of AWD front axle - inspect grease packing and correct												•
<b>Applicable additional work</b> (▷ page 90)	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
Transfer case												•
Front axle												•
Rear axle												•
<b>Function check</b>												
Check parking brake (function test only)	•	•	•	•	•	•	•	•	•	•	•	•
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		
Differential/transfer case lock mechanisms (front, rear and center)												•

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

**Recommended Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check and correct headlamp setting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Visual and functional checks</b>												
Check seat belts and buckles for signs of external damage and proper function	•	•	•	•	•	•	•	•	•	•	•	•
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Check, clean and lubricate tilt/sliding roof mechanism (where applicable)	•	•	•	•	•	•	•	•	•			•
Check, clean and lubricate panoramic roof mechanism (where applicable)	•				•			•	•			
Clean and lubricate soft top/retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Check bodywork for paint work damage	•	•	•	•	•	•	•	•	•	•	•	•
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			
Lubricate door locks, including rear door												•
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•


**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•
Chassis and load-bearing body components: Check for damage and corrosion	•	•	•	•	•	•	•	•	•	•	•	•

**High-mileage Service at 170,000 miles or 17 years; then every 20,000 miles or 2 years**

**Required Service Work**

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Engine - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
Check catch, safety catch and hinges on engine hood for proper operation	•	•	•	•	•	•	•	•	•	•	•	•
Fill up AdBlue® (engine 642)						•	•	•				
Reset maintenance service indicator in instrument cluster	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads, front and rear	•	•	•	•	•	•	•	•	•	•	•	•
Correct tire inflation pressure	•	•	•	•	•	•	•	•	•	•	•	•
Correct inflation pressure in spare tire (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
<b>Applicable additional work</b> (▷ page 90)	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Engine cooling system, antifreeze and corrosion protection (engine 275 main circuit)		•							•	•		
Check coolant level	•	•	•	•	•	•	•	•	•	•	•	•
Brake system	•	•	•	•	•	•	•	•	•	•	•	•
Power steering	•	•	•	•	•	•	•	•	•	•	•	•
Windshield washer system	•	•	•	•	•	•	•	•	•	•	•	•
Active Body Control (if applicable)		•							•	•		
Differential lock mechanism fluid reservoir												•
<b>Function check</b>												
Audible warning system (Electric-hydraulic brake system)										•		
Check Electric-hydraulic brake system hydraulic unit										•		

### Recommended Service Work

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
Replace wiper blades	•	•	•	•	•	•	•	•	•	•	•	•



#### Warning!

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Check the following fluid levels, correct if necessary</b>												
If there is a loss of fluid, determine cause and perform repair with separate work order												
Main or starter battery		•	•	•	•				•	•	•	
<b>Electrical system checks</b>												
Horn, high beam flasher, hazard warning flasher, turn signals	•	•	•	•	•	•	•	•	•	•	•	•
Warning/indicator lamps, illumination and interior lighting/ exterior lighting	•	•	•	•	•	•	•	•	•	•	•	•
Check trunk/cargo area lighting	•	•	•	•	•	•	•	•	•	•	•	•
Battery (main/starter/auxiliary) check condition using “Midtronics MCR 717” tester	•	•	•	•	•	•	•	•	•	•	•	•
<b>Visual and functional checks</b>												
Check windshield washer and headlamp cleaning system	•	•	•	•	•	•	•	•	•	•	•	•
Clean and lubricate soft top/ retractable hard top seals (except SL 65 AMG Black Series)			•							•	•	
Night View Assist camera - clean windshield behind the camera cover (where applicable)		•							•			



**Warning!**

Please make sure you read the technical documentation, such as the Operator’s Manual and workshop information, before carrying out any maintenance work.

	C-Class	CL-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	S-Class	SL-Class	SLK-Class	G-Class
<b>Tire checks</b>												
Tire rotation (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Inspect tires for damage, measure tread depth	•	•	•	•	•	•	•	•	•	•	•	•
Check TIREFIT sealant expiration date (where applicable)	•	•	•	•	•	•	•	•	•	•	•	•
Activate Tire Pressure Monitoring System	•	•	•	•	•	•	•	•	•	•	•	•
<b>Chassis checks</b>												
Visually check brake system components, lines, hoses, calipers	•	•	•	•	•	•	•	•	•	•	•	•
Check thickness of brake pads and disks, front and rear wheels removed	•	•	•	•	•	•	•	•	•	•	•	•

**High-mileage additional work**

	CL-Class	S-Class	SL-Class	C-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	SLK-Class	G-Class
<b>If more than 30,000 miles or 3 years since last replacement</b>												
Replace coolant for main circuit (engine 275)	•	•	•									



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

	CL-Class	S-Class	SL-Class	C-Class	CLK-Class	CLS-Class	E-Class	GL-Class	M-Class	R-Class	SLK-Class	G-Class
<b>If more than 40,000 miles or 4 years since last replacement</b>												
Replace air filter (except engine 275)	•	•	•	•	•	•	•	•	•	•	•	•
Replace rear axle differential fluid (only C 63 AMG, CLS 63 AMG, E 63 AMG, SL 63 AMG with AMG Performance Package, SL 65 AMG and SL 65 AMG Black Series)			•	•		•	•					
Automatic transmission - oil and filter change	•	•	•	•	•	•	•	•	•	•	•	•
<b>If more than 50,000 miles or 5 years since last replacement</b>												
Replace activated charcoal filter (if applicable)					•							
Oil change in front axle												•
Oil change in rear axle												•
Oil change in transfer case												•
<b>If more than 60,000 miles or 6 years since last replacement</b>												
Replace air filter (engine 275)	•	•	•									
Replace fuel filter			•									•
Replace spark plugs (engine 275)	•	•	•									
<b>If more than 80,000 miles or 8 years since last replacement</b>												
Replace spark plugs (except engine 275, 642)	•	•	•	•	•	•	•	•	•	•	•	•



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.





**Maintenance service**Vehicle Identification Number (VIN) Date Odometer Repair order no.(if applicable) Next maintenance due: Miles Next maintenance due: Month/year **Oil Brand / viscosity:**Engine oil Rear axle differential fluid Automatic transmission **Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

  
 Rubber stamp/Signature
**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

Vehicle Identification Number (VIN)

Date

Odometer

Repair order no.(if applicable)

Next maintenance due: Miles

Next maintenance due: Month/year

**Oil Brand / viscosity:**

Engine oil

Rear axle differential fluid

Automatic transmission

**Replaced:**

- Engine oil
- Oil - automatic transmission
- Brake fluid

- Rear axle differential fluid
- Brake pads front axle
- Brake pads rear axle
- Fuel filter
- Combination filter
- Air filter
- Coolant
- Spark plugs
- AdBlue®

Rubber stamp/Signature



**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.

**Warning!**

Please make sure you read the technical documentation, such as the Operator's Manual and workshop information, before carrying out any maintenance work.







## **Internet**

For further information you can find us on the Mercedes-Benz web-site [www.mbusa.com](http://www.mbusa.com).

## **Service and Literature**

Reprinting, translation and copying, even of excerpts, are not permitted without our prior authorization in writing.

Press time January 15, 2009

GSP/OIS

Printed in U. S. A.

## **Model**

C-Class, CL-Class, CLK-Class, CLS-Class,  
E-Class, G-Class, GL-Class, M-Class, R-Class,  
S-Class, SL-Class, SLK-Class



2305841095

Order no. 6515 8333 13 Part no. 230 584 10 95 Edition E 2009